


IT(RMS)		12A
VDRM/VRRM		600V
VTM		1.7V

FEATURES

IT(RMS): 12A

VGT: 1.0V

VDRM VRRM:600V

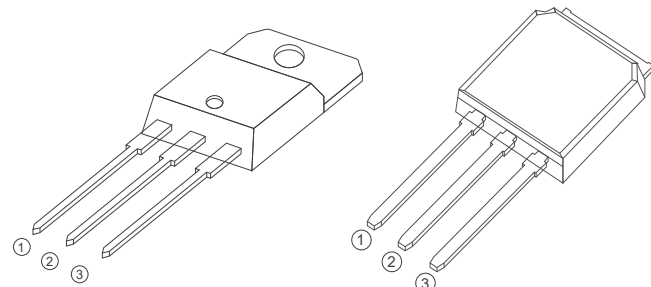

TO-220B Non-Insulated

TO-251

APPLICATIONS


Heater Control

Motor Speed Controller

Washing machine


Vacuums

Solid state relay

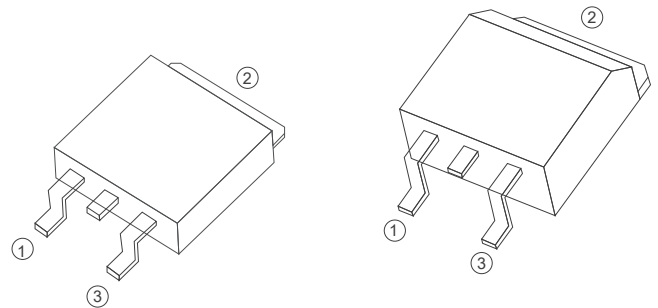

TO-252

TO-263



Absolute Maximum Ratings (T_j=25°C unless otherwise specified)

Symbol	Parameter	Conditions	Ratings	Unit
VDRM VRRM	Repetitive Peak Off-State Voltage	TYN612 / TYN812/TYN1212	600/800 1200	V
IT(RMS)	R.M.S On-State Current	T _c =105°C	12	A
IT(AV)	On-state average current	T _C =105°C	7.5	A
ITSM	Surge On-State Current	T _p =10ms/t _p =8.3ms	120/132	A
I ² t	I ² t for fusing	T _p =10ms	75	A ² s
PGM	Peak Gate Power Dissipation	T _j =125°C	2	W
PG(AV)	Average Gate Power Dissipation	T _j =125°C	0.5	W
T _j	Operating Junction Temperature		~40~125	°C
TSTG	Storage Temperature		~40~150	°C

Electrical Characteristics (T_j=25°C unless otherwise specified)

Symbol	Parameter	Test Conditions	Value	Unit
IDRM	Repetitive Peak Off-State Current	T _c =25°C	≤10	uA
		T _c =125°C	≤1	mA
IRRM	Repetitive Peak Reverse Current	T _c =25°C	≤10	uA
		T _c =125°C	≤1	mA
VTM	Forward "on" voltage	I _T =23A t _p =380us	≤1.7	V
VGT	Gate trigger voltage	V _D =12V ,I _T =0.1A	≤1.0	V
di/dt	Critical rate of rise of on-state current	T _j =125°C, I _G =2xI _{GT} , t _r ≤100ns	≥50	A/us
IGT	Gate trigger current	V _D =12V I _T =0.1A	≤20	mA
IL	Latching current	I _G =1.2I _{GT}	≤40	mA
IH	Holding current	I _T =0.1A	≤30	mA
VGD	Gate non-trigger voltage	V _D =VDRM T _J =125°C, R _L =3.3KΩ, R _{GK} =1KΩ	≥0.25	V
dv/dt	Critical-rate of rise of commutation voltage	T _J =125°C V _D =2/3VDRM Gate open circuit	≥200	V/us
Rth(j-c)	Thermal resistance	Junction to case	1	°C/W
Rth(j-a)	Thermal resistance	Junction to ambient	50	°C/W

FIG1

Maximum power dissipation versus RMS on-state current

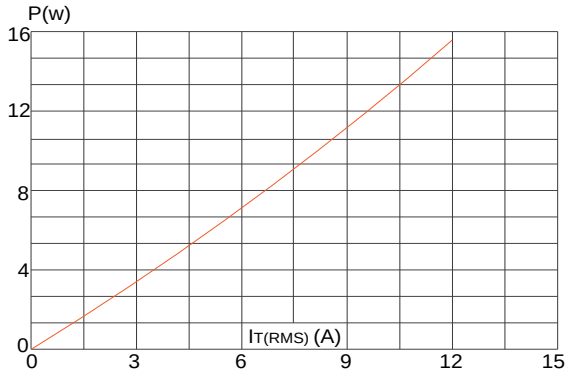


FIG2

RMS on-state current versus case temperature

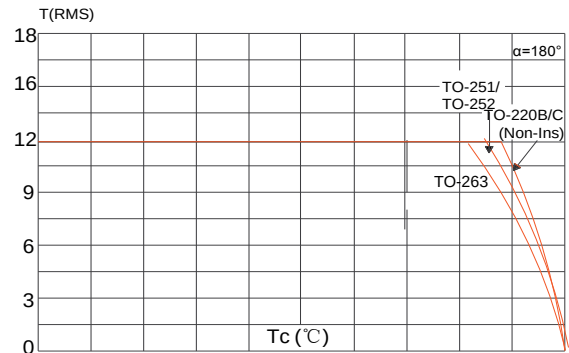


FIG3

Surge peak on-state current versus number of cycles

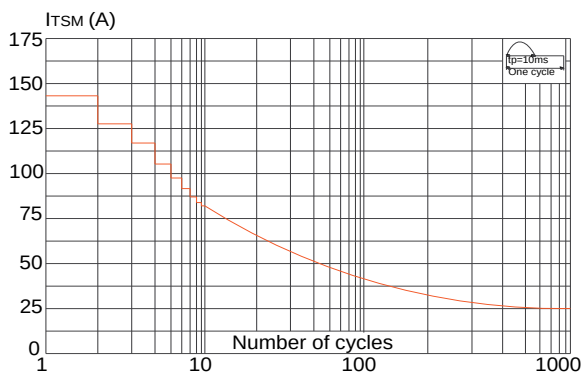


FIG4

On-state characteristics (maximum values)

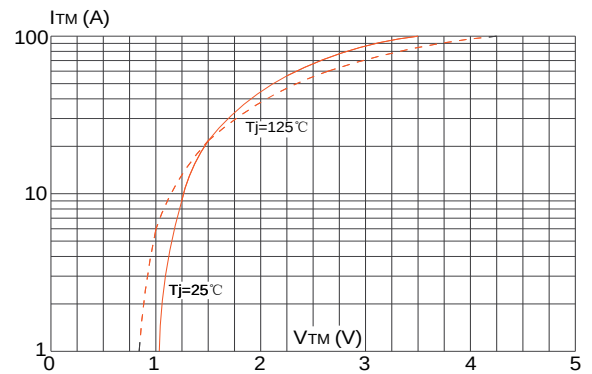


FIG5

Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ms}$, and corresponding value of I^2t ($di/dt < 100\text{A}/\mu\text{s}$)



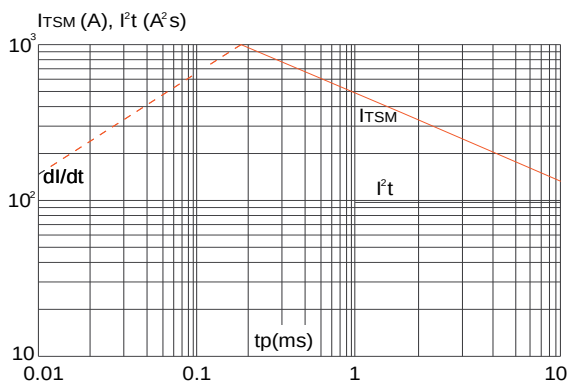


FIG6


FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

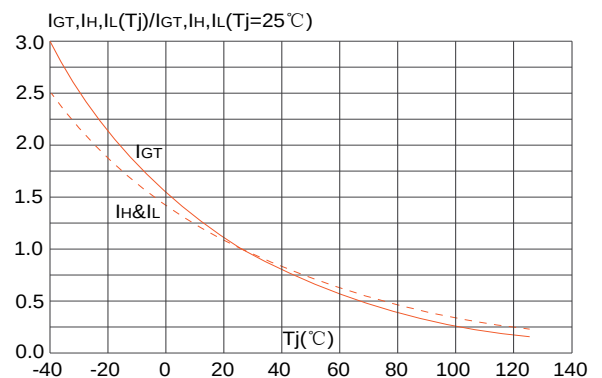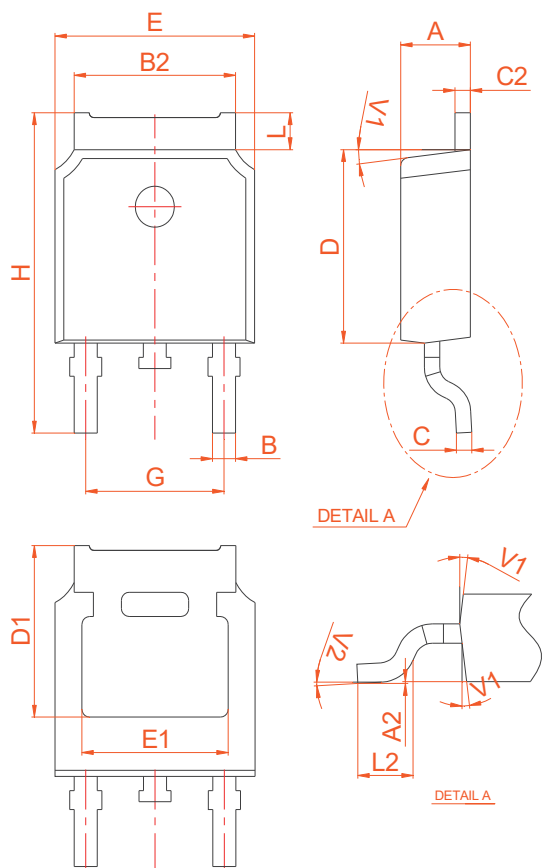


PACKAGE MECHANICAL DATA


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.20		2.40	0.086		0.095
A2	0.03		0.23	0.001		0.009
B	0.55		0.65	0.022		0.026
B2	5.10		5.40	0.200		0.213
C	0.45		0.55	0.018		0.022
C2	2.70		2.90	0.106		0.114
D	6.00		6.20	0.236		0.244
E	6.40		6.70	0.252		0.264
G	4.40		4.70	0.173		0.185
H	9.35		10.6	0.368		0.417
L1	1.30		1.70	0.051		0.067
L2	1.37		1.50	0.054		0.059
L3		0.8			0.031	
L4		0.8			0.031	
V1		4°			4°	
V2	0°		8°	0°		8°


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.60		10.4	0.378		0.409
F	6.20		6.60	0.244		0.260
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

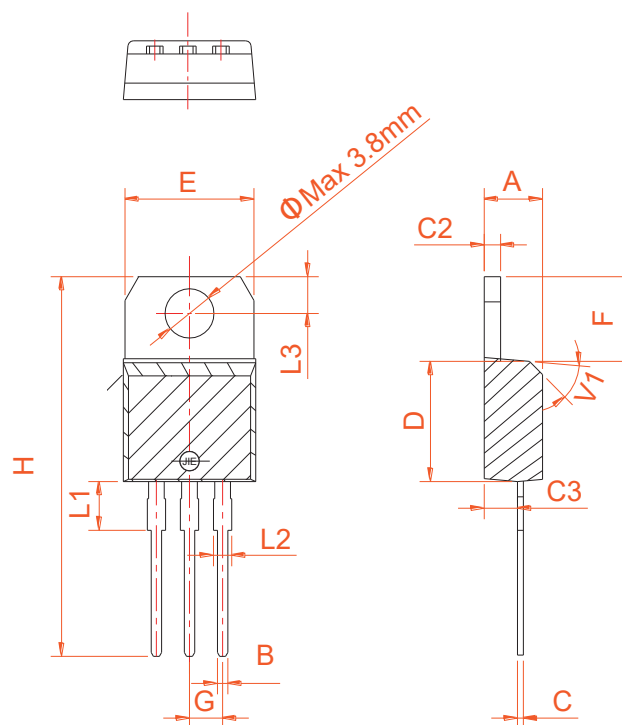


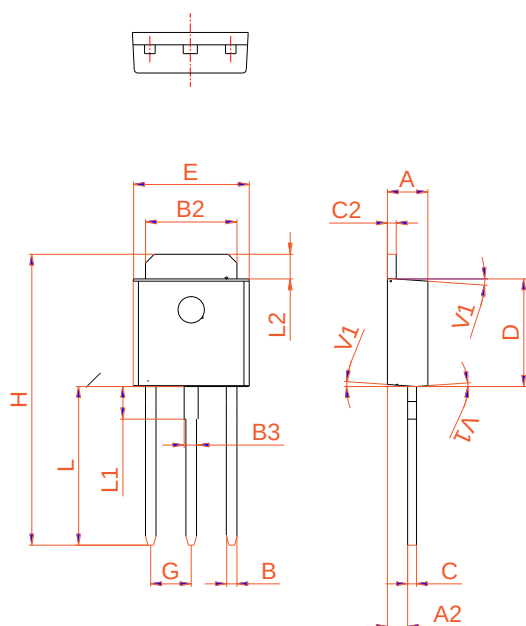PACKAGE MECHANICAL DATA

TO-251

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.20		2.40	0.086		0.095
A2	0.90		1.20	0.035		0.047
B	0.55		0.65	0.022		0.026
B2	5.10		5.40	0.200		0.213
B3	0.76		0.85	0.030		0.033
C	0.45		0.62	0.018		0.024
C2	0.48		0.62	0.019		0.024
D	6.00		6.20	0.236		0.244
E	6.40		6.70	0.252		0.264
G		2.30			0.091	
H	16.0		17.0	0.630		0.669
L	8.90		9.40	0.350		0.370
L1	1.80		1.90	0.071		0.075
L2	1.37		1.50	0.054		0.059
V1		4°			4°	

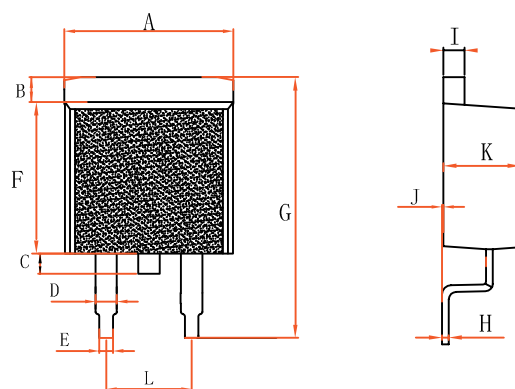Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.7		10.4	0.381		0.409
B	1.31		1.62	0.051		0.063
C	0.65		1.22	0.025		0.048
D	1.15		1.36	0.045		0.053
E	0.62		0.95	0.024		0.037
F	8.75		9.32	0.344		0.366
G	14.75		15.8	0.58		0.622
H	0.32		0.48	0.012		0.018
I	1.18		1.36	0.046		0.053
J	0		0.15	0		0.005
K	4.38		4.86	0.172		0.191
L	4.85		5.23	0.19		0.205

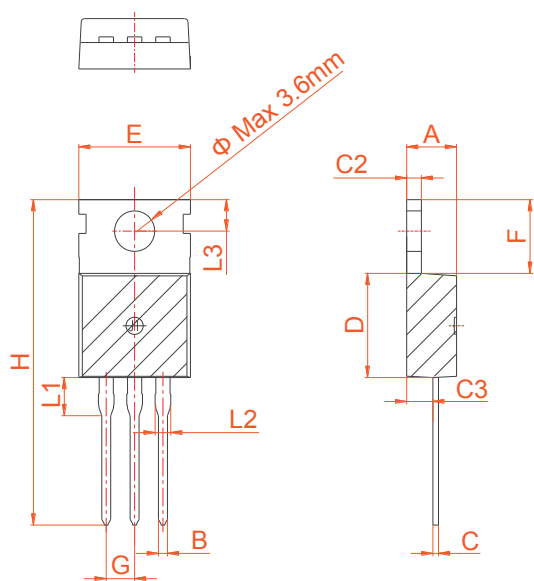
TO-263

PACKAGE MECHANICAL DATA

TO-220C

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.70		0.90	0.028		0.035
C	0.45		0.60	0.018		0.024
C2	1.23		1.32	0.048		0.052
C3	2.20		2.60	0.087		0.102
D	8.90		9.90	0.350		0.390
E	9.90		10.3	0.390		0.406
F	6.30		6.90	0.248		0.272
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.39			0.133	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
Φ		3.6			0.142	