

Description

The LM317S is an adjustable 3-terminal positive-voltage regulator capable of supplying 1 A over an output-voltage range of 1.2 V to 37 V. It is exceptionally easy to use and requires only two external resistors to set the output voltage. In addition, internal current limiting, thermal shutdown, and safe area compensation, making it essentially blow-out proof.

The LM317S serves a wide variety of applications including local, on card regulation. This device can also be used to make a programmable output regulator, or by connecting a fixed resistor between the adjustment and output, the LM317S can be used as a precision current regulator.


Features

- Output Current in Excess of 1 A
- Output Adjustable Between 1.2 V and 37 V
- Internal Thermal Overload Protection
- Internal Short Circuit Current Limiting Constant with Temperature
- Output Transistor Safe-Area Compensation
- Eliminates Stocking many Fixed Voltages
- Available Packages: SOT-223, TO-252 and SOP-8

Applications

- Electronic Points of Sale
- Medical, Health, and Fitness Applications
- Appliances and White Goods
- TV Set-Top Boxes

Typical Applications

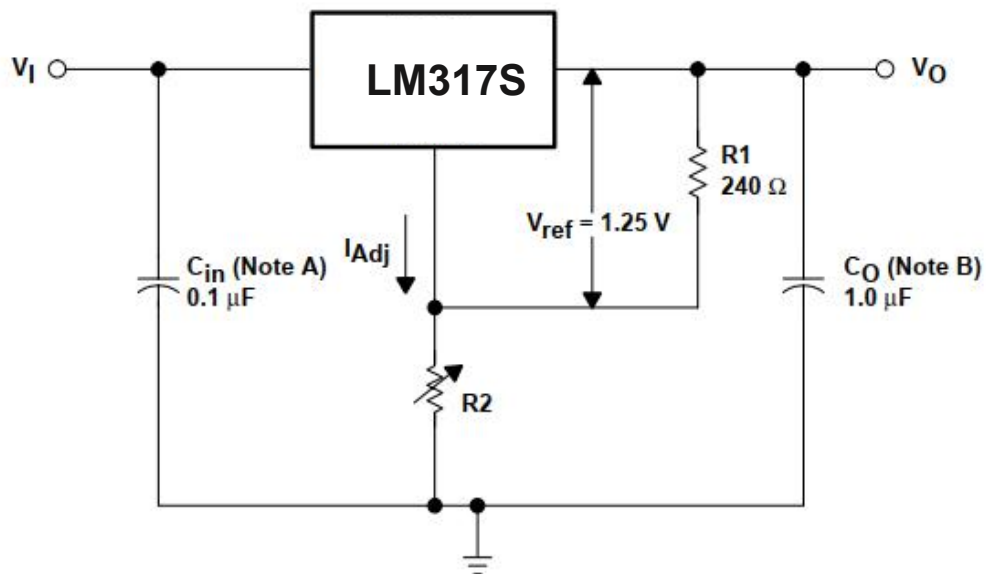
**Note:**

C_{in} is required if regulator is located an appreciable distance from power supply filter.
 C_O is not needed for stability, however, it does improve transient response.

$$V_{OUT} = 1.25V(1 + R_2/R_1) + I_{Adj} R_2$$

Since I_{Adj} is controlled to less than $50 \mu A$, the error associated with this term is negligible in most applications.




Pin Distribution

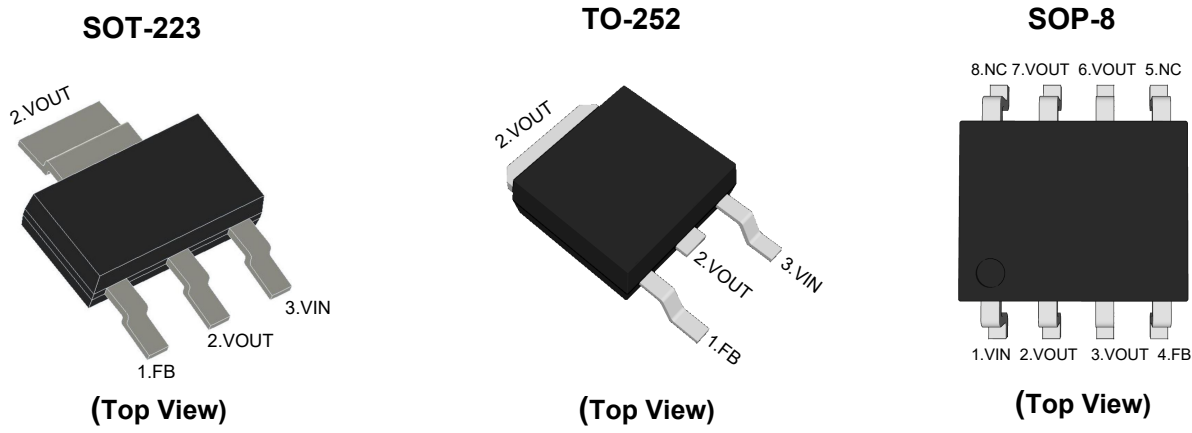

Functional Pin Description

Pin Name	Pin Function
FB	Output Feedback Voltage
VOUT	Output Voltage
VIN	Power Input Voltage
NC	No Connected

Ordering Information Continue


Orderable Device	Package	Reel (inch)	Package Qty (PCS)	Eco Plan ^{Note}	MSL Level	Marking Code
LM317SST	SOT-223	13	4000	RoHS & Green	MSL3	
LM317STE	TO-252	13	2500	RoHS & Green	MSL3	
LM317SPA	SOP-8	13	4000	RoHS & Green	MSL3	

Note:

RoHS: TN defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials.

Green: TN defines "Green" to mean Halogen-Free and Antimony-Free.

Function Block Diagram

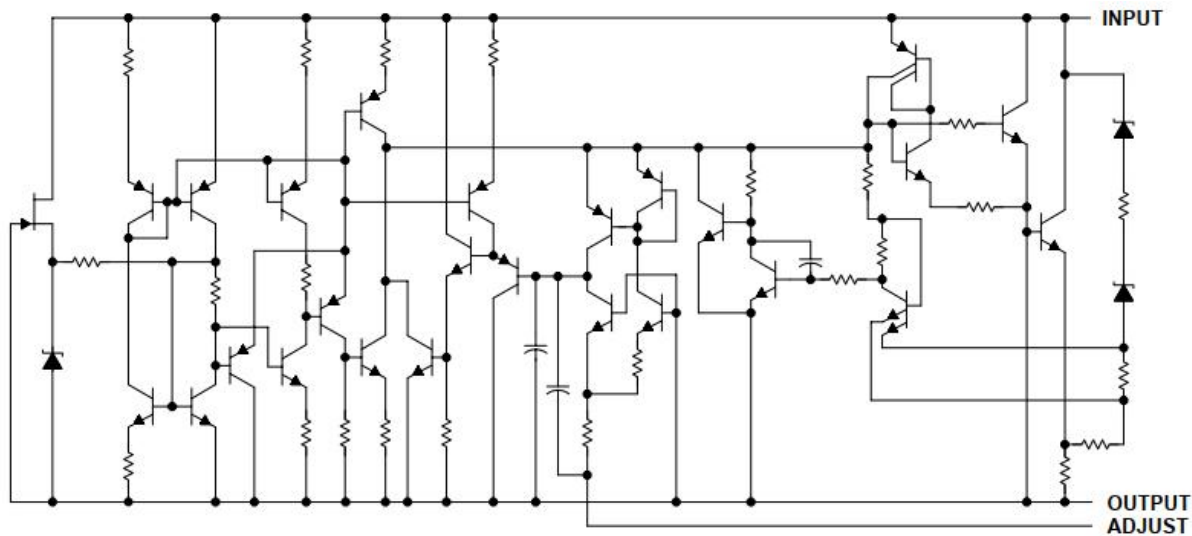

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter		Value	Unit
Input–Output Voltage Differential		40	V
Output Current		Internally limited	--
Power Dissipation	SOT-223	0.6	W
	TO-252	0.9	W
	SOP-8	0.5	W
Thermal Resistance,Junction-to-Ambient	SOT-223	165	°C/W
	TO-252	112	°C/W
	SOP-8	190	°C/W
Junction temperature		150	°C
Storage temperature range		-40 ~ +150	°C

Recommended Operating Conditions

Parameter	Min.	Max.	Unit
Input–Output Voltage Differential	3	37	V
Output Current	--	1	A
Operating Ambient Temperature	0	125	°C

Electrical Characteristics

(V_I-V_O=5V, I_O=500mA, T_J=0~125°C, unless otherwise noted.)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Line Regulation	ΔV_{LINE}	V _I -V _O =3V~40V	--	0.01	0.04	%/V
Load Regulation	ΔV_{LOAD}	V _O ≤ 5V, I _O =10mA~1000mA	--	5	25	mV
		V _O ≥ 5V, I _O =10mA~1000mA	--	0.1	0.5	% V _O
Adjustment Pin Current	I _{adj}		--	--	100	μA
Adjustment Pin Current Change	ΔI_{adj}	V _I -V _O =2.5V~40V, I _O =10mA~1000mA	--	0.2	5	μA
Reference Voltage	V _{ref}	V _I -V _O =3V~40V, I _O =10mA~1000mA	1.2	--	1.3	V
Reference Line Regulation	ΔV_{LINE}	V _I -V _O =3V~40V	--	0.02	0.07	%V
Reference Load Regulation	ΔV_{LOAD}	V _O ≤ 5V, I _O =10mA~1000mA	--	20	70	mV
		V _O ≥ 5V, I _O =10mA~1000mA	--	0.3	1.5	% V _O
Temperature Stability	T _S		--	1	--	%
Minimum Load Current to Maintain Regulation	I _{O_min}	V _I -V _O =40V	--	--	10	mA
Maximum Load Current to Maintain Regulation	I _{O_max}	V _I -V _O ≤ 15V, P _D <20W	1	--	--	A
		V _I -V _O =40V, P _D <20W	0.1	0.3	--	A
RMS Noise, % of V _O	N	T _A =25°C, 10Hz<f<10KHz	--	0.003	--	% V _O
Rejection Ratio	RR	T _A =25°C, f=120Hz, C _{adj} =0	--	65	--	dB
		T _A =25°C, f=120Hz, C _{adj} =10μF	66	80	--	dB

Typical Characteristic Curves

图 5. 负载调整率

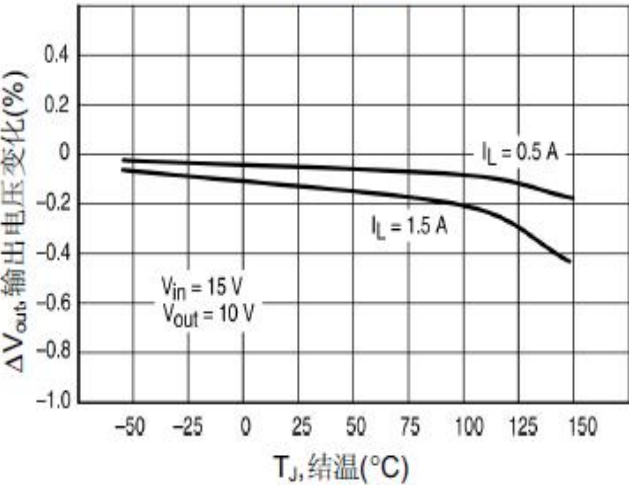


图 6. 电流限度

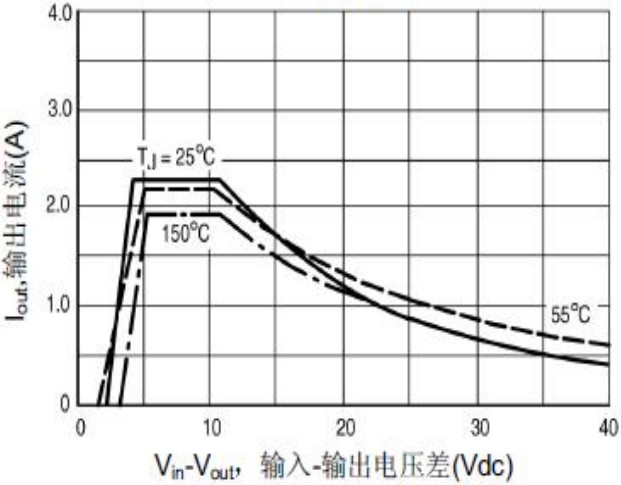


图 7. 调节管脚电流

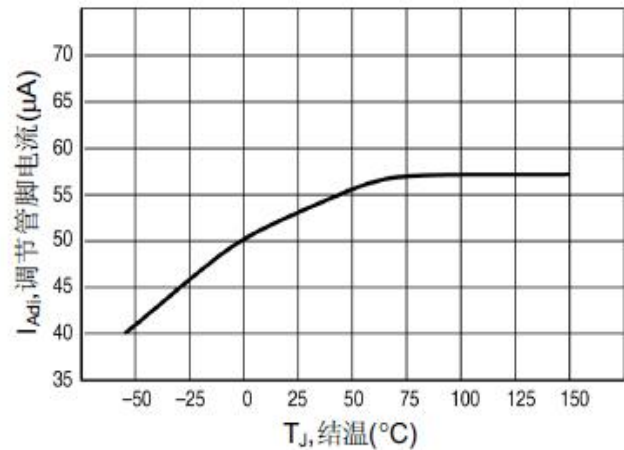


图 8. 压降电压

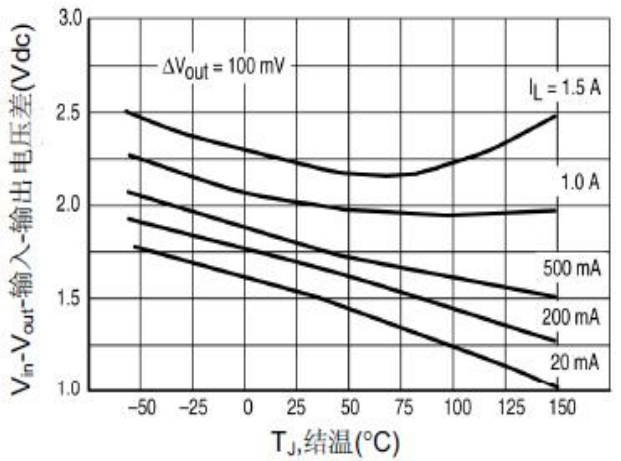


图 9. 温度稳定性

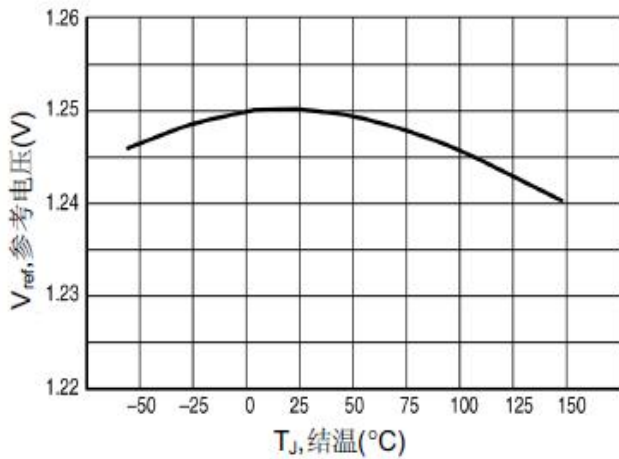


图 10. 最小工作电流

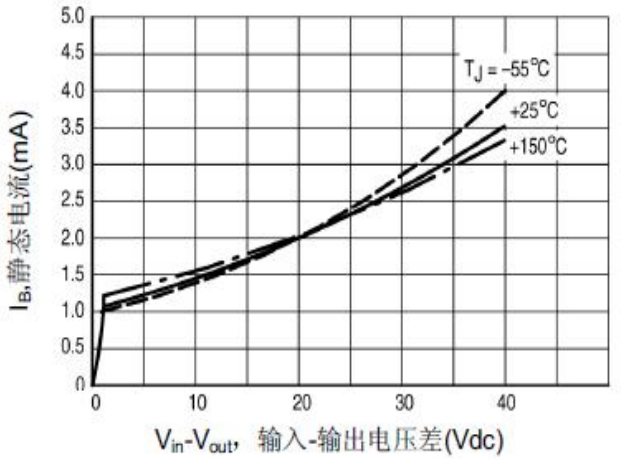


图 11. 纹波抑制与输出电压关系曲线

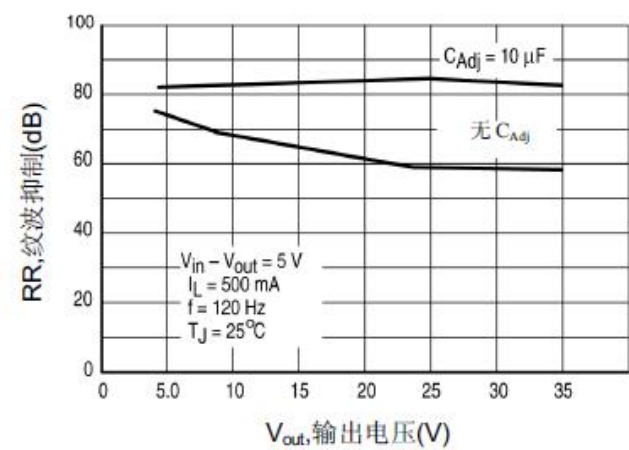


图 12. 纹波抑制与输出电流关系曲线

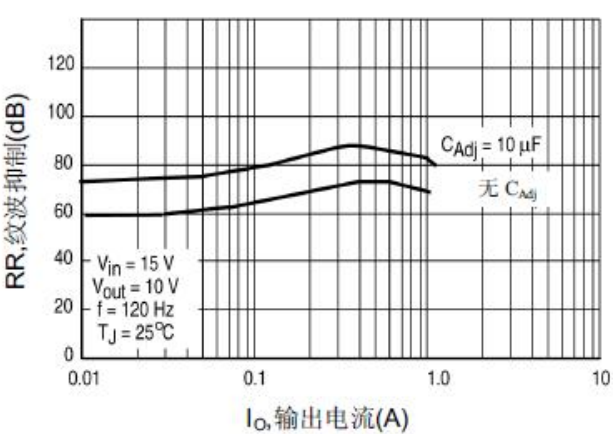


图 13. 纹波抑制与频率关系曲线

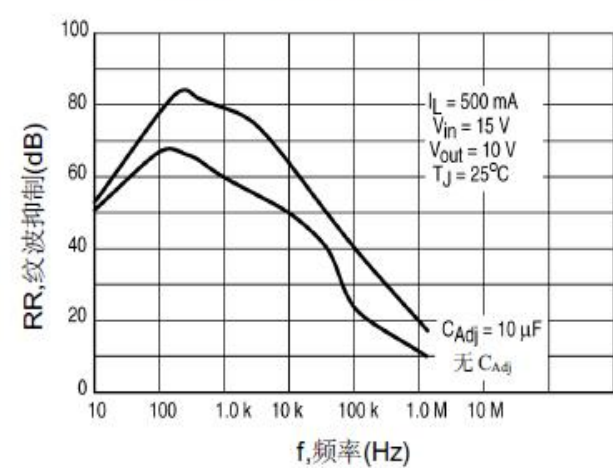


图 14. 输出阻抗

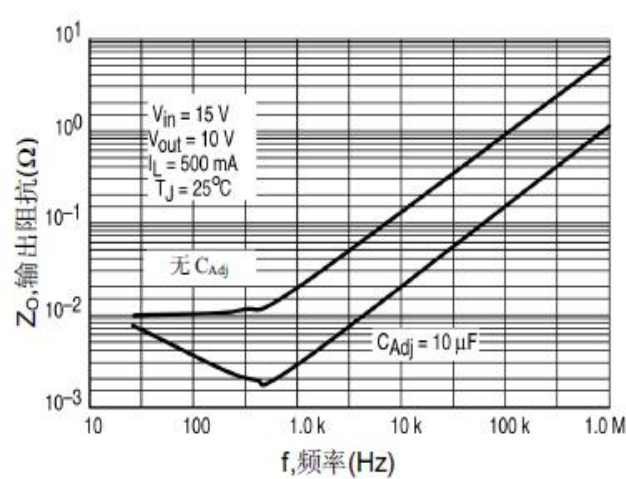


图 15. 电源瞬态响应


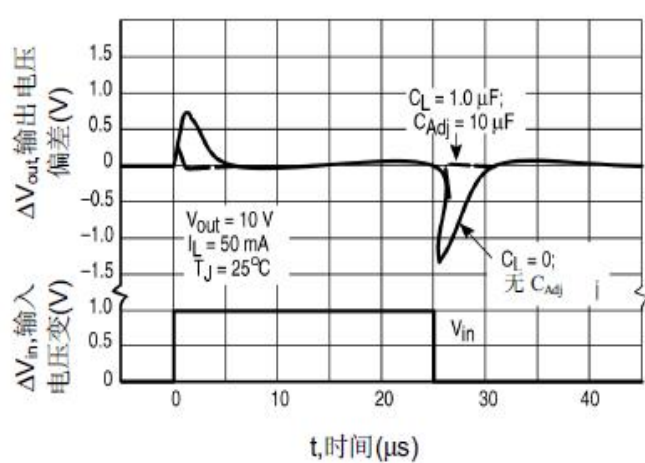


图 16. 负载瞬态响应

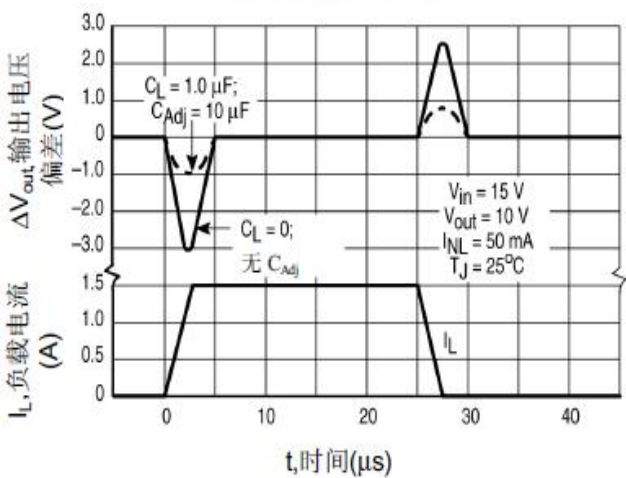


Applications Information

Basic Circuit Operation

The LM317S is a 3-terminal floating regulator. In operation, the LM317S develops and maintains a nominal 1.25V reference (V_{ref}) between its output and adjustment terminals. This reference voltage is converted to a programming current (I_{PROG}) by R_1 (see the following figure), and this constant current flows through R_2 to ground.

The regulated output voltage is given by:

$$V_{OUT} = 1.25V \cdot (1 + R_2/R_1) + I_{Adj} \cdot R_2$$

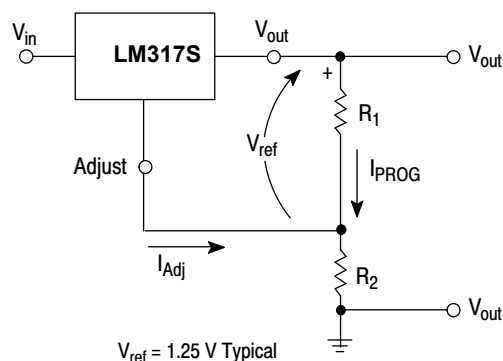

Basic Circuit Configuration

Since the current from the adjustment terminal (I_{Adj}) represents an error term in the equation, the LM317S was designed to control I_{Adj} to less than 100 μA and keep it constant. To do this, all quiescent operating current is returned to the output terminal. This imposes the requirement for a minimum load current. If the load current is less than this minimum, the output voltage will rise.

Since the LM317S is a floating regulator, it is only the voltage differential across the circuit which is important to performance, and operation at high voltages with respect to ground is possible.

Load Regulation

The LM317S is capable of providing extremely good load regulation, but a few precautions are needed to obtain maximum performance. For best performance, the programming resistor (R_1) should be connected as close to the regulator as possible to minimize line drops which effectively appear in series with the reference, thereby degrading regulation. The ground end of R_2 can be returned near the load ground to provide remote ground sensing and improve load regulation.

External Capacitors


A 0.1 μF disc or 1.0 μF tantalum input bypass capacitor (C_{in}) is recommended to reduce the sensitivity to input line impedance. The adjustment terminal may be bypassed to ground to improve ripple rejection. This capacitor (C_{Adj}) prevents ripple from being amplified as the output voltage is increased. A 10 μF capacitor should improve ripple rejection about 15 dB at 120 Hz in a 10V application.

Although the LM317S is stable with no output capacitance, like any feedback circuit, certain values of external capacitance can cause excessive ringing. An output capacitance (C_2) in the form of a 1.0 μF tantalum or 25 μF aluminum electrolytic capacitor on the output swamps this effect and insures stability.

Protection Diodes

When external capacitors are used with any IC regulator it is sometimes necessary to add protection diodes to prevent the capacitors from discharging through low current points into the regulator. The following figure shows the LM317S with the recommended protection diodes for output voltages in excess of 25 V or high capacitance values ($C_O > 25\mu\text{F}$, $C_{Adj} > 10\mu\text{F}$). Diode D1 prevents C_O from discharging thru the IC during an input short circuit. Diode D2 protects against capacitor C_{Adj} discharging through the IC during an output short circuit.

The combination of diodes D1 and D2 prevents C_{Adj} from discharging through the IC during an input short circuit.

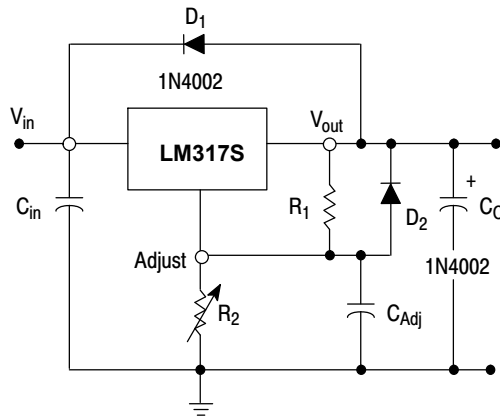


Voltage Regulator with Protection Diodes

Package Outline

SOT-223

Dimensions in mm

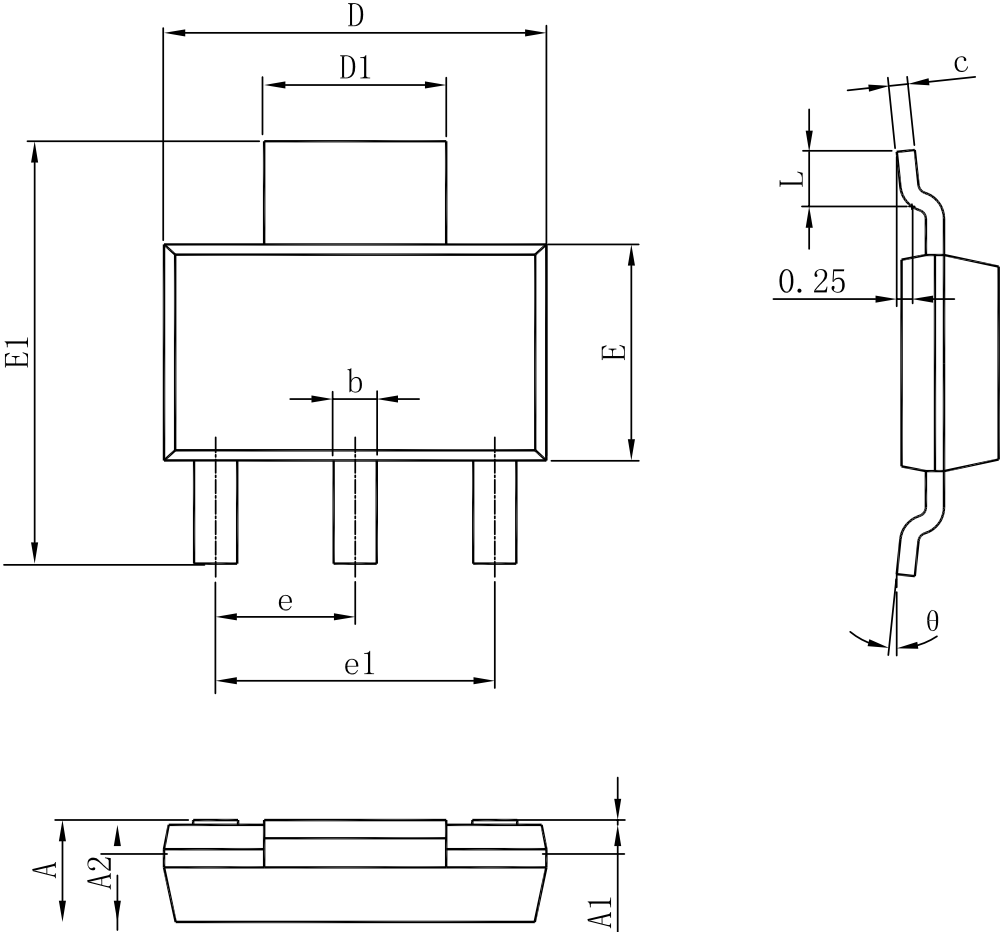


- 1. 塑脂体无缺损、缩孔、气泡、裂纹等缺陷；
- 2. 树脂体上下部XY方向偏差、树脂体中心与引线框中心错位±0.035；
- 3. 粗糙度Ra为0.4--0.6。

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	/	/	1.80
A1	0.02	/	0.10
A2	1.50	1.60	1.70
b	0.66	0.71	0.84
c	0.23	0.30	0.35
D	6.30	6.50	6.70
D1	2.90	3.00	3.10
E	3.30	3.50	3.70
E1	6.70	7.00	7.30
e	2.30 BASIC		
e1	4.60 BASIC		
L	0.75	/	/
θ	0°	/	10°


Package Outline

TO-252


Dimensions in mm

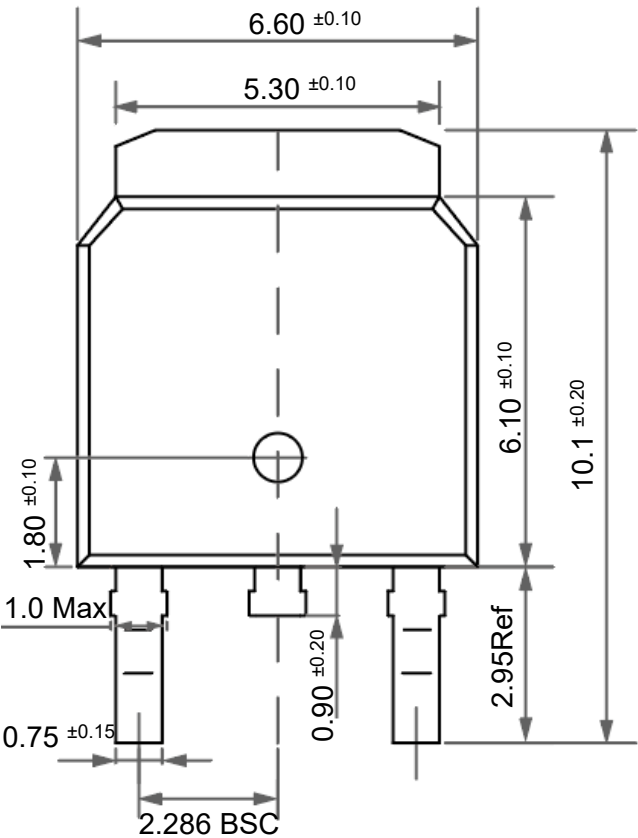

Front View

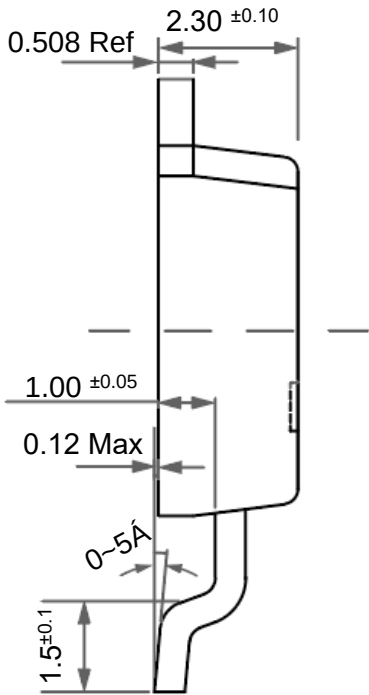


Side View

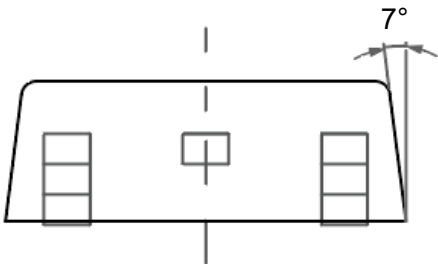

Bottom View

Outline Drawing – SOP-8(Dimensions in mm)

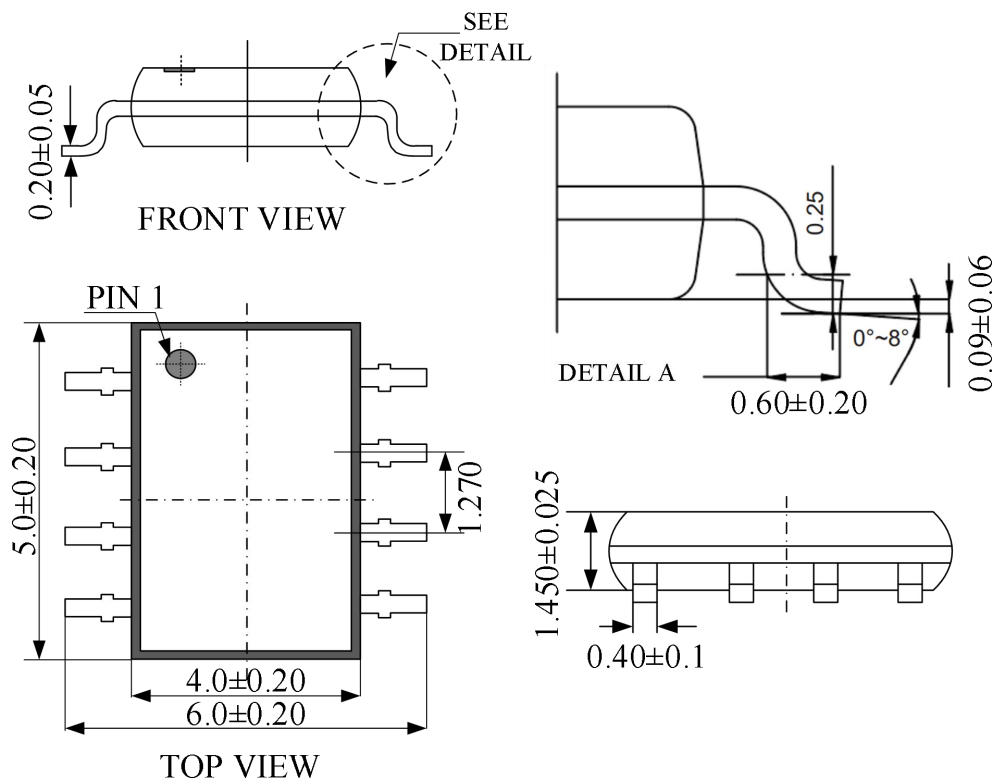

Package Information

Package Type	Description	Quantity (pcs)	Standard
SOP-8	Reel -13" tape	4000	EIA-481

Contact Information

TANI website: <http://www.tanisemi.com> Email: tani@tanisemi.com

For additional information, please contact your local Sales Representative.

 is registered trademarks of TANI Corporation.

Product Specification Statement

The product specification aims to provide users with a reference regarding various product parameters, performance, and usage. It presents certain aspects of the product's performance in graphical form and is intended solely for users to select product and make product comparisons, enabling users to better understand and evaluate the characteristics and advantages of the product. It does not constitute any commitment, warranty, or guarantee.

The product parameters described in the product specification are numerical values, characteristics, and functions obtained through actual testing or theoretical calculations of the product in an independent or ideal state. Due to the complexity of product applications and variations in test conditions and equipment, there may be slight fluctuations in parameter test values. TANI shall not guarantee that the actual performance of the product when installed in the customer's system or equipment will be entirely consistent with the product specification, especially concerning dynamic parameters. It is recommended that users consult with professionals for product selection and system design. Users should also thoroughly validate and assess whether the actual parameters and performance when installed in their respective systems or equipment meet their requirements or expectations. Additionally, users should exercise caution in verifying product compatibility issues, and TANI assumes no responsibility for the application of the product. TANI strives to provide accurate and up-to-date information to the best of our ability. However, due to technical, human, or other reasons, TANI cannot guarantee that the information provided in the product specification is entirely accurate and error-free. TANI shall not be held responsible for any losses or damages resulting from the use or reliance on any information in these product specifications.

TANI reserves the right to revise or update the product specification and the products at any time without prior notice, and the user's continued use of the product specification is considered an acceptance of these revisions and updates. Prior to purchasing and using the product, users should verify the above information with TANI to ensure that the product specification is the most current, effective, and complete. If users are particularly concerned about product parameters, please consult TANI in detail or request relevant product test reports. TANI shall assume no responsibility for any consequences resulting from such usage.

Users are advised to pay attention to the parameter limit values specified in the product specification and maintain a certain margin in design or application to ensure that the product does not exceed the parameter limit values defined in the product specification. This precaution should be taken to avoid exceeding one or more of the limit values, which may result in permanent irreversible damage to the product, ultimately affecting the quality and reliability of the system or equipment.

The design of the product is intended to meet civilian needs and is not guaranteed for use in harsh environments or precision equipment. It is not recommended for use in systems or equipment such as medical devices, aircraft, nuclear power, and similar systems, where failures in these systems or equipment could reasonably be expected to result in personal injury. TANI shall assume no responsibility for any consequences resulting from such usage.

Users should also comply with relevant laws, regulations, policies, and standards when using the product specification. Users are responsible for the risks and liabilities arising from the use of the product specification and must ensure that it is not used for illegal purposes. Additionally, users should respect the intellectual property rights related to the product specification and refrain from infringing upon any third-party legal rights. TANI shall assume no responsibility for any disputes or controversies arising from the above-mentioned issues in any form.