

IT(RMS)		40A
VDRM/VRRM		1200V
VTM		1.55V

FEATURES

IT(RMS): 40A

VGT: 1.5 V

VDRM VRRM: 1200 V

APPLICATIONS


Heater Control

Motor Speed Controller


Washing machine

Vacuums

Solid state relay

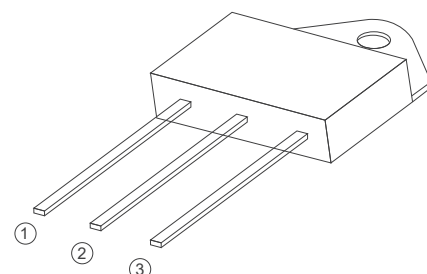

TO-3P Insulated



Absolute Maximum Ratings (Tj=25°C unless otherwise specified)


Symbol	Parameter	Conditions	Ratings	Unit
VDRM VRRM	Repetitive Peak Off-State Voltage	SCR40 -1200B	1200	V
		SCR40 -1600B	1600	V
IT(RMS)	R.M.S On-State Current		40	A
ITSM	Surge On-State Current	F=50Hz, tp=10ms/8.3ms	460	A
I ² t	I ² t for fusing	Tp=10ms	1060	A ² s
PG(AV)	Average Gate Power Dissipation	Tj=125°C	1	W
PGM	Peak Gate Current	Tj=125°C	5	W
IGM	Peak Gate Current	tp=10us	4	A
Tj	Operating Junction Temperature		~40~125	°C
TSTG	Storage Temperature		~40~150	°C

Electrical Characteristics ($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Value	Unit
IDRM	Repetitive Peak Off-State Current	$T_c=25^\circ\text{C}$	≤ 10	μA
		$T_c=125^\circ\text{C}$	≤ 4	mA
IRRM	Repetitive Peak Reverse Current	$T_c=25^\circ\text{C}$	≤ 10	μA
		$T_c=125^\circ\text{C}$	≤ 4	mA
VTM	Forward "on" voltage	$I_T=80\text{A}$ $t_p=380\mu\text{s}$	≤ 1.55	V
VGD	Gate nontrigger voltage	$V_D=V_{\text{DRM}}$, $T_j=125^\circ\text{C}$, $R_L=3.3\text{K}\Omega$	≥ 0.2	V
IL	Latching current	$I_G=1.2I_{GT}$	≤ 90	mA
IH	Holding current	$V_D=12\text{V}$, $I_{GT}=0.1\text{A}$	≤ 70	mA
VGT	Gate trigger voltage	$V_D=12\text{V}$	≤ 1.5	V
IGT	Gate trigger current	$V_D=12\text{V}$, $I_T=0.1\text{A}$	≤ 35	mA
dv/dt	Critical-rate of rise of commutation voltage	$V_D=2/3V_{\text{DRM}}$, $T_j=125^\circ\text{C}$, gate open circuit	≥ 200	$\text{V}/\mu\text{s}$
di/dt	Critical-rate of rise of commutation current	$I_G=2X I_{GT}$, $t_r=100\mu\text{s}$, $T_j=125^\circ\text{C}$	≥ 120	$\text{A}/\mu\text{s}$
Rth(j-c)	Thermal resistance	Junction to case	1.1	$^\circ\text{C}/\text{W}$

FIG1

Maximum power dissipation versus RMS on-state current

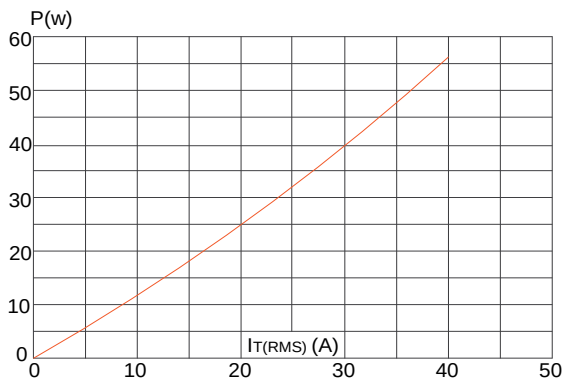
FIG2

RMS on-state current versus case temperature

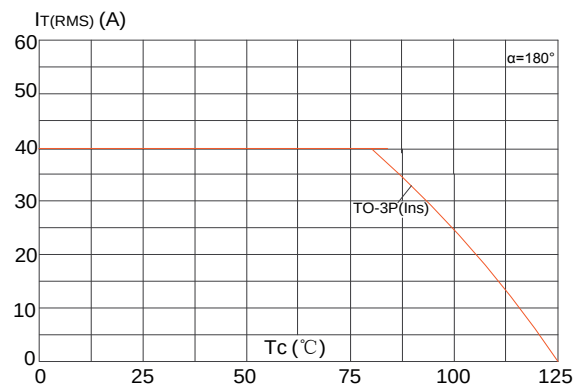


FIG3

Surge peak on-state current versus number of cycles

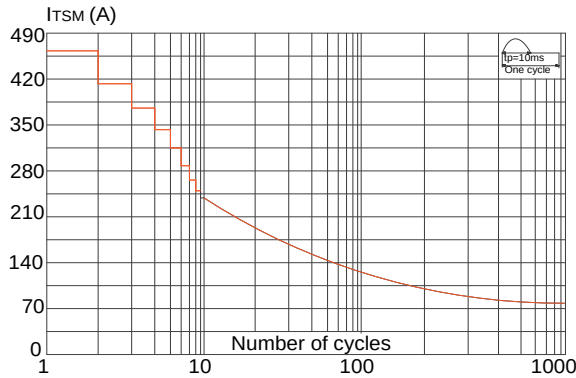


FIG4

On-state characteristics (maximum values)

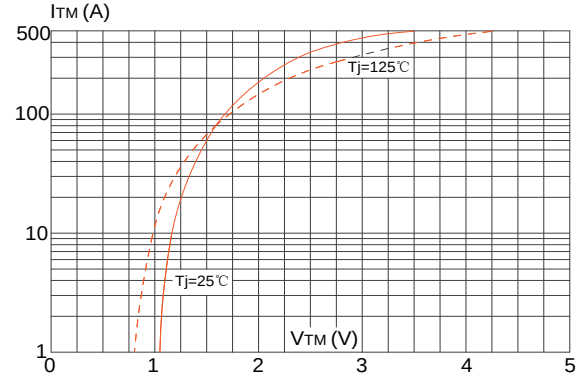


FIG5

Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ms}$, and corresponding value of I^2t ($di/dt < 100\text{A}/\mu\text{s}$)



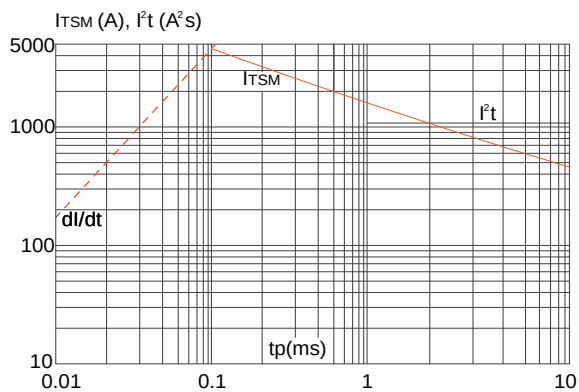


FIG6

FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

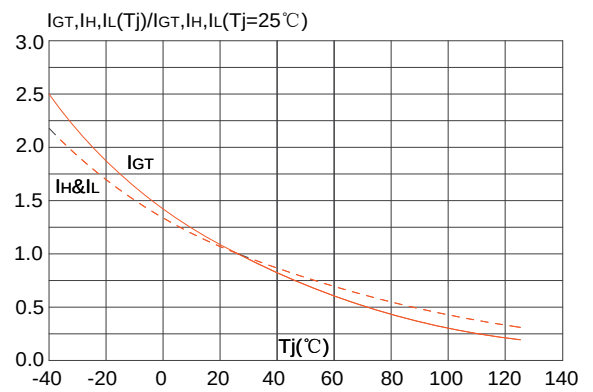

PACKAGE MECHANICAL DATA

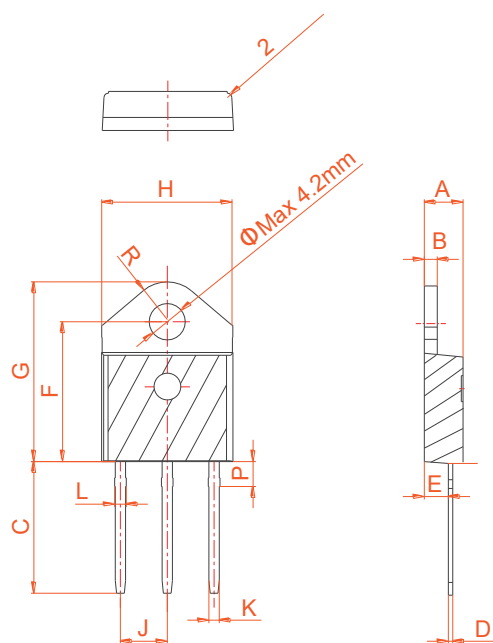

TO-3P Ins

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	1.45		1.55	0.057		0.061
C	14.35		15.60	0.565		0.614
D	0.50		0.70	0.020		0.028
E	2.70		2.90	0.106		0.114
F	15.80		16.50	0.622		0.650
G	20.40		21.10	0.803		0.831
H	15.10		15.50	0.594		0.610
J	5.40		5.65	0.213		0.222
K	1.10		1.40	0.043		0.055
L	1.35		1.50	0.053		0.059
P	2.80		3.00	0.110		0.118
R		4.35			0.171	