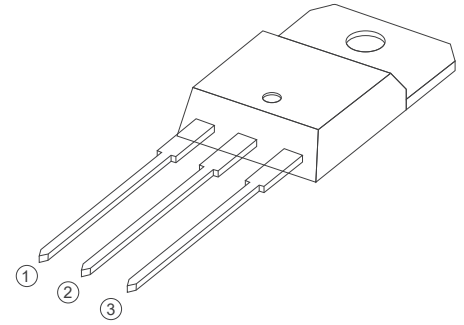


IT(RMS)		25A
VDRM/VRRM		600V
VTM		1.55V




TO-220A Insulated

FEATURES

IT(RMS): 25A

VGT: 1.3V

VDRM VRRM:600V

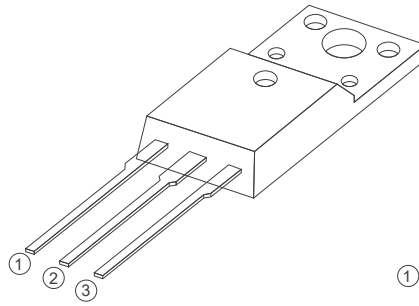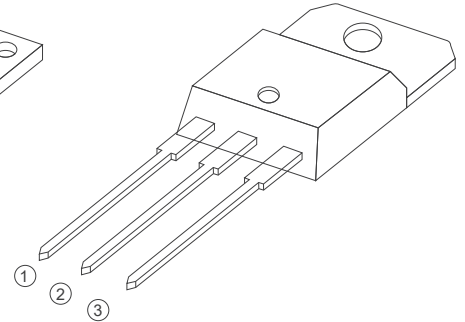
TO-220F Insulated

TO-220B Non-Insulated

APPLICATIONS



Heater Control

Motor Speed Controller

Washing machine

Vacuums

Solid state relay


TO-263

Absolute Maximum Ratings ($T_j=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Conditions	Ratings	Unit
VDRM VRRM	Repetitive Peak Off-State Voltage	TYN625	600	V
		TYN825	800	
IT(RMS)	R.M.S On-State Current		25	A
ITSM	Surge On-State Current	F=50Hz, $t_p=10\text{ms}$	300	A
I^2t	I^2t for fusing	$T_p=10\text{ms}$	450	A^2s
IGM	Peak Gate Current	$t_p=20\mu\text{s}$ $T_j=110^{\circ}\text{C}$	4	A
PG(AV)	Average Gate Power Dissipation	$T_j=125^{\circ}\text{C}$	1	W
PGM	Peak Gate Current	$T_j=125^{\circ}\text{C}$	5	W
T_j	Operating Junction Temperature		$\sim 40\sim 125$	$^{\circ}\text{C}$
TSTG	Storage Temperature		$\sim 40\sim 150$	$^{\circ}\text{C}$

Electrical Characteristics ($T_j=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Value	Unit
IDRM	Repetitive Peak Off-State Current	$T_c=25^{\circ}\text{C}$	≤ 10	μA
		$T_c=125^{\circ}\text{C}$	≤ 4	mA
IRRM	Repetitive Peak Reverse Current	$T_c=25^{\circ}\text{C}$	≤ 10	μA
		$T_c=125^{\circ}\text{C}$	≤ 4	mA
VTM	Forward "on" voltage	$I_T=50\text{A}$ $t_p=380\mu\text{s}$	≤ 1.55	V
VGD	Gate nontrigger voltage	$V_D=V_{DRM}$, $T_j=125^{\circ}\text{C}$, $R_L=3.3\text{K}\Omega$	≥ 0.25	V
IL	Latching current	$I_G=1.2I_{GT}$	≤ 90	mA
IH	Holding current	$V_D=12\text{V}$, $I_{GT}=0.1\text{A}$	≤ 80	mA
VGT	Gate trigger voltage	$V_D=12\text{V}$	≤ 1.3	V
IGT	Gate trigger current	$V_D=12\text{V}$, $I_T=0.1\text{A}$	≤ 40	mA
dv/dt	Critical-rate of rise of commutation voltage	$V_D=2/3V_{DRM}$, $T_j=110^{\circ}\text{C}$, $R_{GK}=1\text{K}\Omega$	≥ 200	V/ μs
di/dt	Critical-rate of rise of commutation current	$I_G=2X I_{GT}$, $t_r \leq 100\mu\text{s}$, $T_j=125^{\circ}\text{C}$	≥ 50	A/ μs

FIG1

Maximum power dissipation versus RMS on-state current

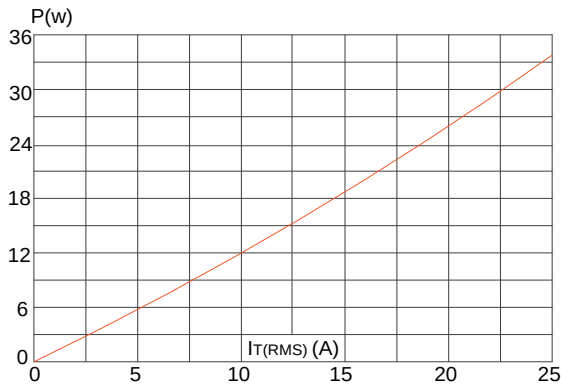


FIG2

RMS on-state current versus case temperature

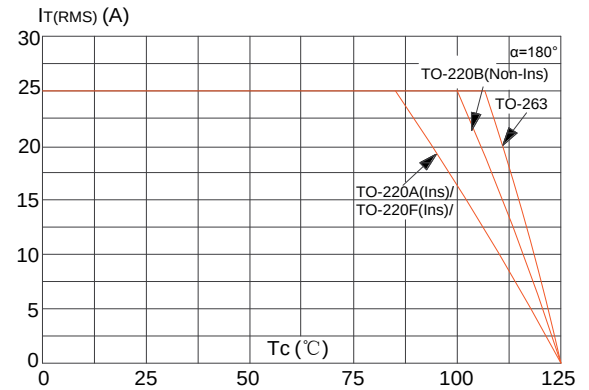


FIG3

Surge peak on-state current versus number of cycles

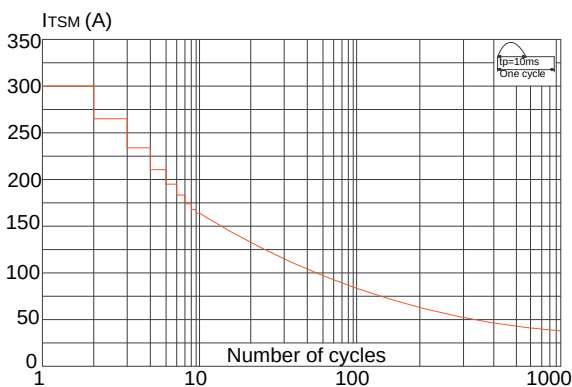


FIG4

On-state characteristics (maximum values)

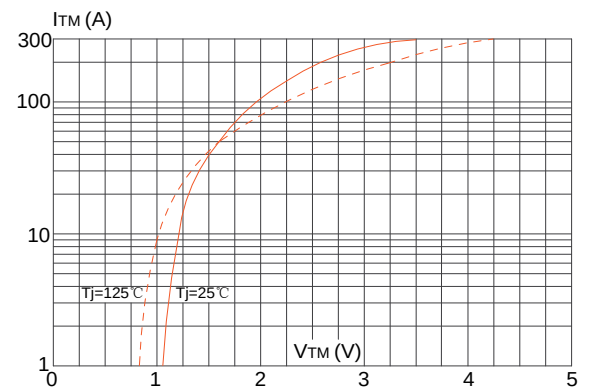


FIG5

Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ms}$, and corresponding value of I^2t ($dI/dt < 100\text{A}/\mu\text{s}$)



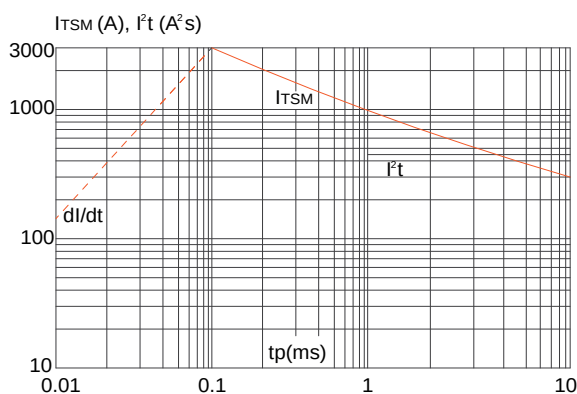


FIG6

FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

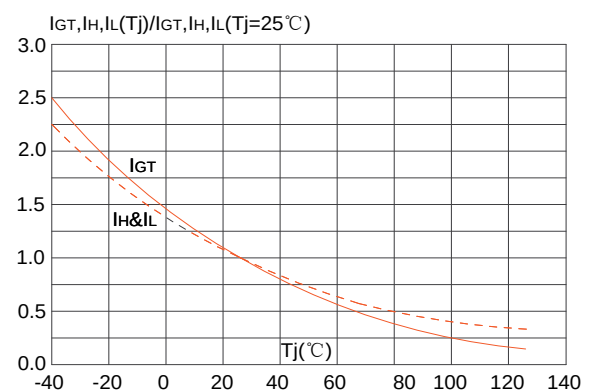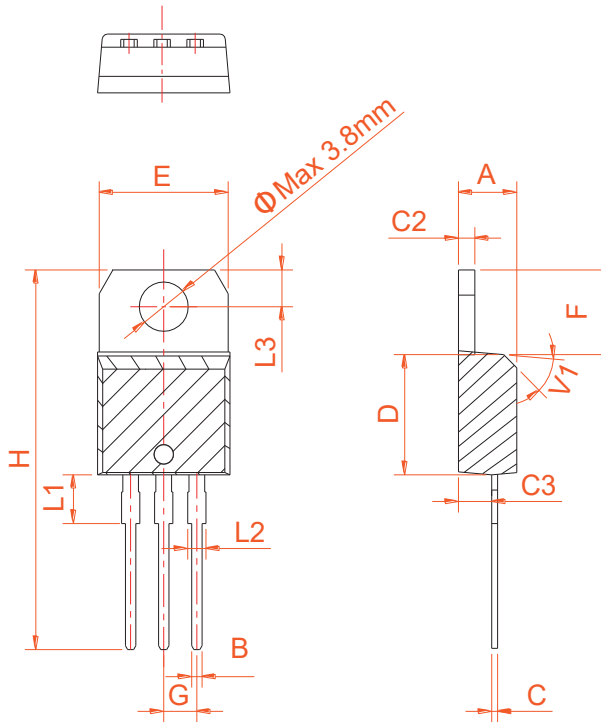


PACKAGE MECHANICAL DATA


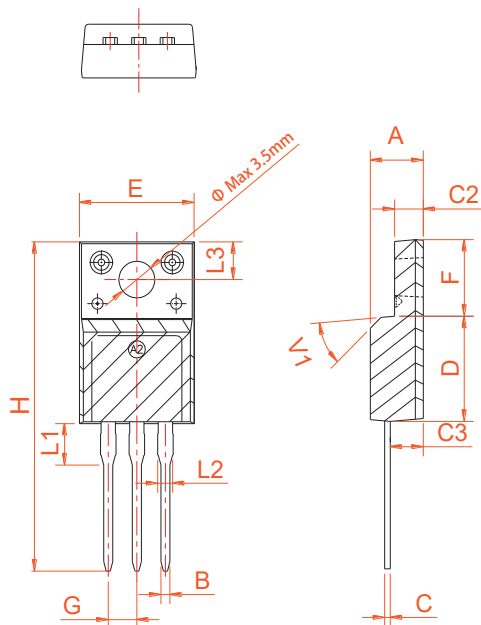
TO-220A Ins

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.60		10.4	0.378		0.409
F	6.20		6.60	0.244		0.260
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.80		10.4	0.386		0.409
F	6.55		6.95	0.258		0.274
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

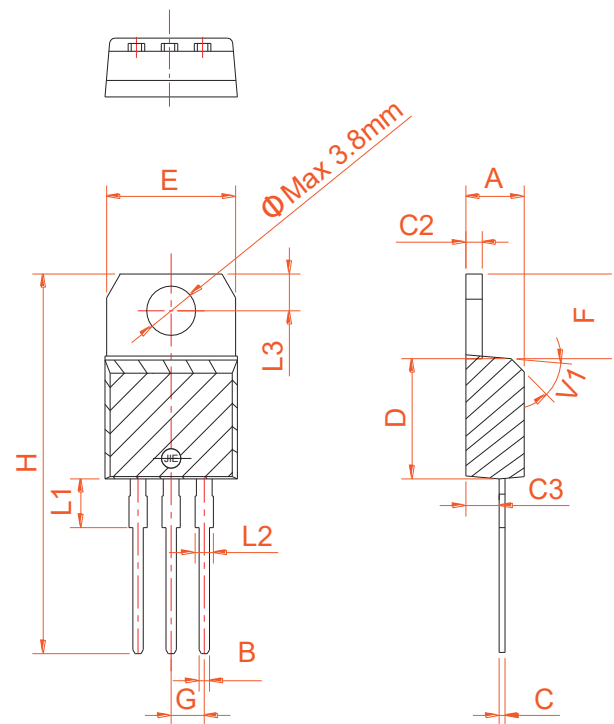


TO-220B Non-Ins

PACKAGE MECHANICAL DATA


TO-220F Ins

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.50		4.90	0.177		0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47		0.65	0.019		0.026
C2	2.45		2.75	0.096		0.108
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.80		10.4	0.386		0.410
F	6.40		6.80	0.252		0.268
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.63			0.143	
L2	1.14		1.70	0.045		0.067
L3		3.30			0.130	
V1		45°			45°	

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.7		10.4	0.381		0.409
B	1.31		1.62	0.051		0.063
C	0.65		1.22	0.025		0.048
D	1.15		1.36	0.045		0.053
E	0.62		0.95	0.024		0.037
F	8.75		9.32	0.344		0.366
G	14.75		15.8	0.58		0.622
H	0.32		0.48	0.012		0.018
I	1.18		1.36	0.046		0.053
J	0		0.15	0		0.005
K	4.38		4.86	0.172		0.191
L	4.85		5.23	0.19		0.205

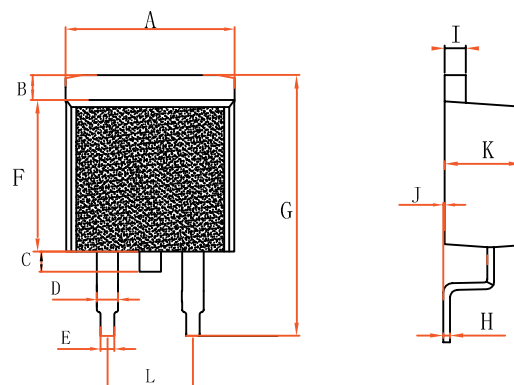

T0-263