

1.Description

The 75xx series is a low-power high-voltage regulator manufactured by CMOS process. The maximum input voltage is 30V and the output voltage range is 1.5V~12.0V. It has the characteristics of high precision output voltage, very low power supply current and very low drop voltage.

3.Applications


- Battery power supply equipment
- Audio / video equipment

2.Features

- Low power consumption: $\leq 3\mu A$
- Low drop voltage: typical value 0.1V
- Low temperature bleaching: typical 50 ppm/°C
- High input voltage: up to 30V
- High precision output voltage: tolerance of +3%
- Package form: TO-92, SOT89-3, SOT-23-3

4.Pinning information


Pin	Symbol	Description
1	G	GND
2	V	VIN
3	V	VOUT
4,5	N	NC

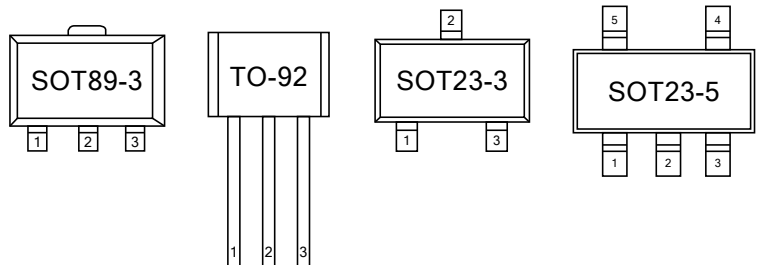

5.Model selection

Name	Model	Maximum input voltage (V)	Output voltage (V)	Tolerance	Packaging Form
75xx-1	7530	30	3	±3%	TO 92 SOT-89 SOT23-3 SOT-23-5
	7533	30	3.3	±3%	
	7536	30	3.6	±3%	
	7540	30	4	±3%	
	7544	30	4.4	±3%	
	7550	30	5	±3%	

6.Principle block diagram

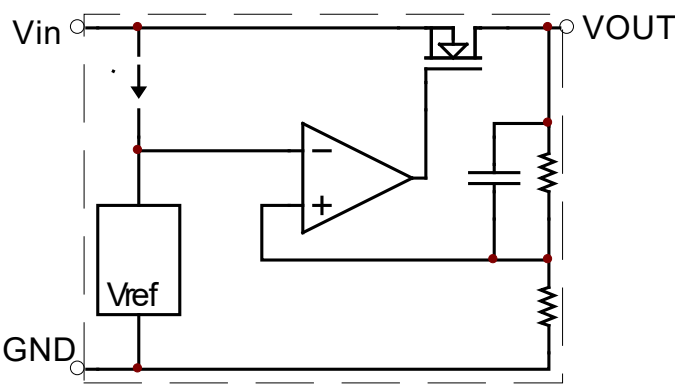

7.Limit parameter

Project	Symbol	parameter		Limit value	Company
Voltage	VIN	Maximum input voltage		30	V
power waste	PD	power waste	TO-92	700	mV
			SOT-23	300	
			SOT-89	400	
			SOT-23-5	300	
temperature	Tw	working temperature		-40 to 85	°C
	Tc	Storage temperature		-50 to 125	°C
	Th	welding temperature		260	°C,10s

8.1 Electrical properties (7530, $T_{OPT}=25^{\circ}\text{C}$)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V_{OUT}	$V_{IN}=5\text{V}$, $I_{OUT}=10\text{mA}$	2.91	3	3.09	V
Output current	I_{OUT}	$V_{IN}=5\text{V}$	60	100		mA
Load regulation	ΔV_{OUT}	$V_{IN}=5\text{V}$, $1\text{mA} \leq I_{OUT} \leq 20\text{mA}$		100	150	mV
Drop voltage	V_{DIF}	$I_{OUT}=1\text{mA}$		100		mV
Quiescent current	I_{SS}	$V_{IN}=5\text{V}$, no load		2	3	μA
Line Regulation	$\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$	$4\text{V} \leq V_{IN} \leq 30\text{V}$, $I_{OUT}=1\text{mA}$		0.2		%/V
input voltage	V_{IN}				30	V
temperature coefficient	$\Delta V_{OUT}/\Delta T_A$	$V_{IN}=5\text{V}$, $I_{OUT}=10\text{mA}$, $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$		± 0.45		$\text{mV}/^{\circ}\text{C}$

8.2 Electrical properties (7533, $T_{OPT}=25^{\circ}\text{C}$)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V_{OUT}	$V_{IN}=5.5\text{V}$, $I_{OUT}=10\text{mA}$	3.201	3.3	3.399	V
Output current	I_{OUT}	$V_{IN}=5.5\text{V}$	60	100		mA
Load regulation	ΔV_{OUT}	$V_{IN}=5.5\text{V}$, $1\text{mA} \leq I_{OUT} \leq 30\text{mA}$		100	150	mV
Drop voltage	V_{DIF}	$I_{OUT}=1\text{mA}$		100		mV
Quiescent current	I_{SS}	$V_{IN}=5.5\text{V}$, no load		2	3	μA
Line Regulation	$\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$	$4.5\text{V} \leq V_{IN} \leq 30\text{V}$, $I_{OUT}=1\text{mA}$		0.2		%/V
input voltage	V_{IN}				30	V
temperature coefficient	$\Delta V_{OUT}/\Delta T_A$	$V_{IN}=5.5\text{V}$, $I_{OUT}=10\text{mA}$, $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$		± 0.5		$\text{mV}/^{\circ}\text{C}$

8.3 Electrical properties (7536, $T_{OPT}=25^{\circ}C$)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V_{OUT}	$V_{IN}=5.6V$, $I_{OUT}=10mA$	3.492	3.6	3.708	V
Output current	I_{OUT}	$V_{IN}=5.6V$	60	100		mA
Load regulation	ΔV_{OUT}	$V_{IN}=5.6V$, $1mA \leq I_{OUT} \leq 20mA$		100	150	mV
Drop voltage	V_{DIF}	$I_{OUT}=1mA$		100		mV
Quiescent current	I_{SS}	$V_{IN}=5.6V$, no load		2	3	μA
Line Regulation	$\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$	$4.6V \leq V_{IN} \leq 30V$, $I_{OUT}=1mA$		0.2		%/V
input voltage	V_{IN}				30	V
temperature coefficient	$\Delta V_{OUT}/\Delta T_A$	$V_{IN}=5.6V$, $I_{OUT}=10mA$, $0^{\circ}C \leq T_A \leq 70^{\circ}C$		± 0.6		mV/ $^{\circ}C$

8.4 Electrical properties (7540, $T_{OPT}=25^{\circ}C$)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V_{OUT}	$V_{IN}=6V$, $I_{OUT}=10mA$	3.88	4	4.12	V
Output current	I_{OUT}	$V_{IN}=6V$	60	100		mA
Load regulation	ΔV_{OUT}	$V_{IN}=6V$, $1mA \leq I_{OUT} \leq 30mA$		100	150	mV
Drop voltage	V_{DIF}	$I_{OUT}=1mA$		100		mV
Quiescent current	I_{SS}	$V_{IN}=6V$, no load		2	3	μA
Line Regulation	$\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$	$5V \leq V_{IN} \leq 30V$, $I_{OUT}=1mA$		0.2		%/V
input voltage	V_{IN}				30	V
temperature coefficient	$\Delta V_{OUT}/\Delta T_A$	$V_{IN}=6V$, $I_{OUT}=10mA$, $0^{\circ}C \leq T_A \leq 70^{\circ}C$		± 0.7		mV/ $^{\circ}C$


8.5 Electrical properties (7544, $T_{OPT}=25^{\circ}C$)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V_{OUT}	$V_{IN}=6.4V$, $I_{OUT}=10mA$	4.268	4.4	4.532	V
Output current	I_{OUT}	$V_{IN}=6.4V$	60	100		mA
Load regulation	ΔV_{OUT}	$V_{IN}=6.4V$, $1mA \leq I_{OUT} \leq 20mA$		100	150	mV
Drop voltage	V_{DIF}	$I_{OUT}=1mA$		100		mV
Quiescent current	I_{SS}	$V_{IN}=6.4V$, no load		2	3	μA
Line Regulation	$\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$	$5.4V \leq V_{IN} \leq 30V$, $I_{OUT}=1mA$		0.2		%/V
input voltage	V_{IN}				30	V
temperature coefficient	$\Delta V_{OUT}/\Delta T_A$	$V_{IN}=6.4V$, $I_{OUT}=10mA$, $0^{\circ}C \leq T_A \leq 70^{\circ}C$		± 0.7		mV/ $^{\circ}C$


8.6 Electrical properties (7550, $T_{OPT}=25^{\circ}C$)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V_{OUT}	$V_{IN}=7V$, $I_{OUT}=10mA$	4.85	5	5.15	V
Output current	I_{OUT}	$V_{IN}=7V$	60	100		mA
Load regulation	ΔV_{OUT}	$V_{IN}=7V$, $1mA \leq I_{OUT} \leq 30mA$		100		mV
Drop voltage	V_{DIF}	$I_{OUT}=1mA$		100		mV
Quiescent current	I_{SS}	$V_{IN}=7V$, no load		2	3	μA
Line Regulation	$\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$	$6V \leq V_{IN} \leq 30V$, $I_{OUT}=1mA$		0.2		%/V
input voltage	V_{IN}				30	V
temperature coefficient	$\Delta V_{OUT}/\Delta T_A$	$V_{IN}=7V$, $I_{OUT}=10mA$, $0^{\circ}C \leq T_A \leq 70^{\circ}C$		± 0.75		mV/ $^{\circ}C$


9.Application circuit

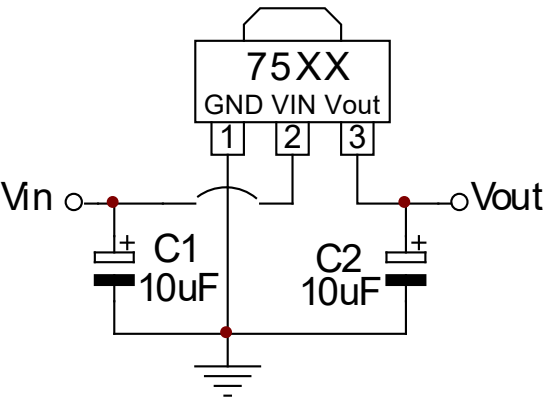


1. Basic circuit

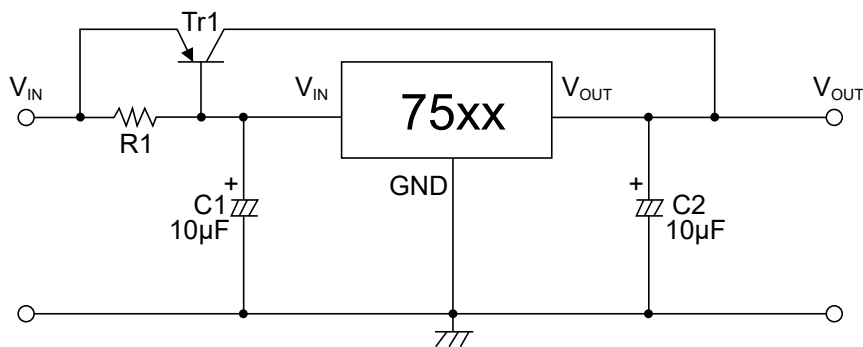


2. High output current regulator

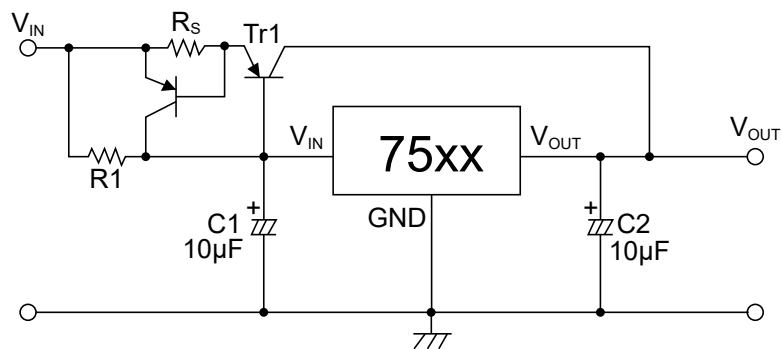


3. Short circuit protection circuit

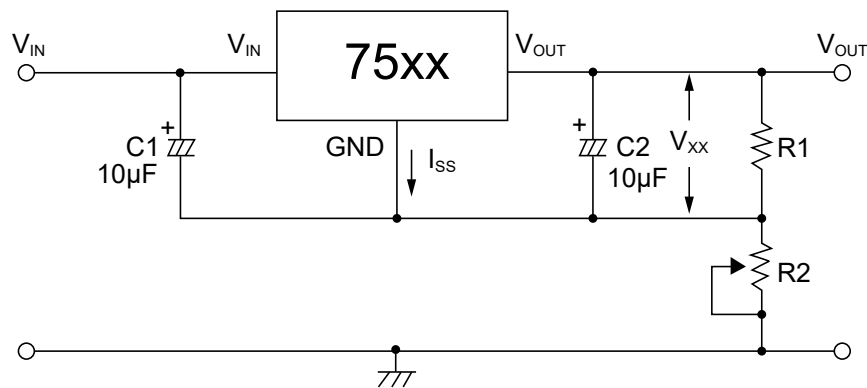


4. Circuit for increasing output voltage (1)

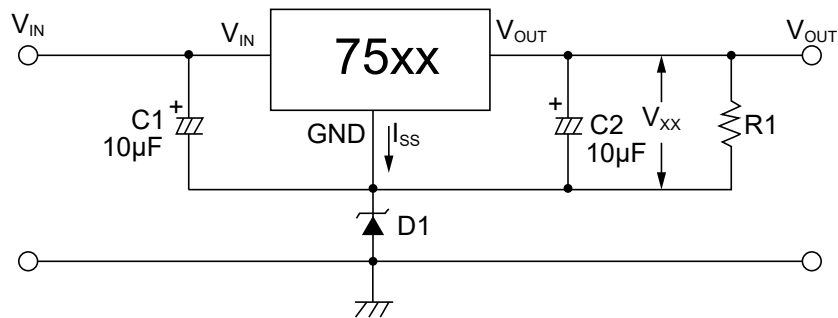

5. Circuit for increasing output voltage (2)

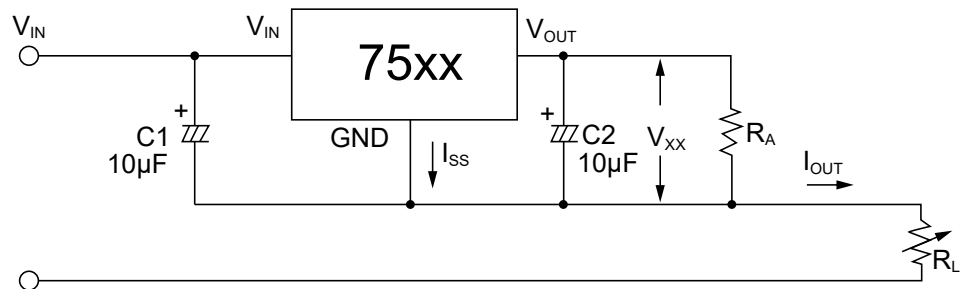


6. Current regulating circuit

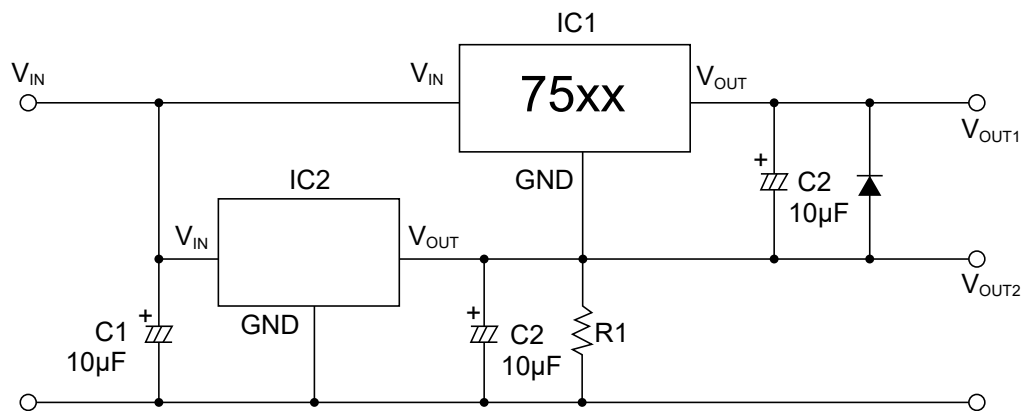

7. Dual output circuit

Notes: “xx”Represents the output voltage.


10.1TO-92 Package Outline Dimensions

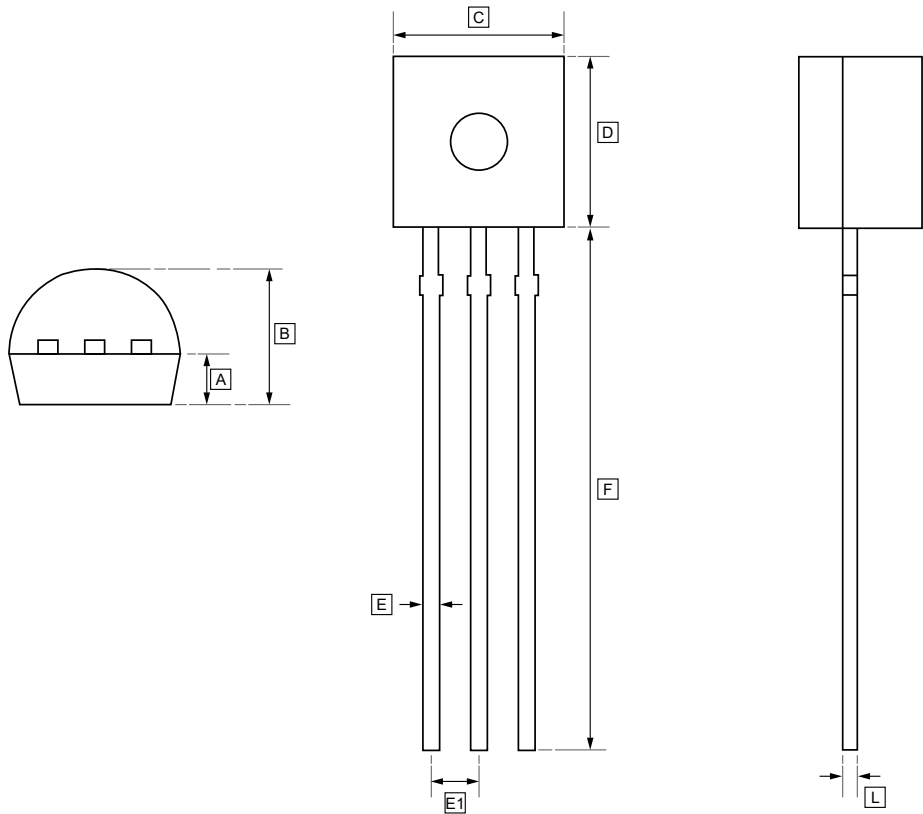

DIMENSIONS (mm are the original dimensions)

Symbol	A	B	C	D	E	E1	F	L
Min	1.10	3.50	4.50	4.40	0.35	1.27	13.50	0.35
Max	1.30	3.90	4.90	4.90	0.45	TYP	14.50	0.40


10.2SOT-89-3 Package Outline Dimensions

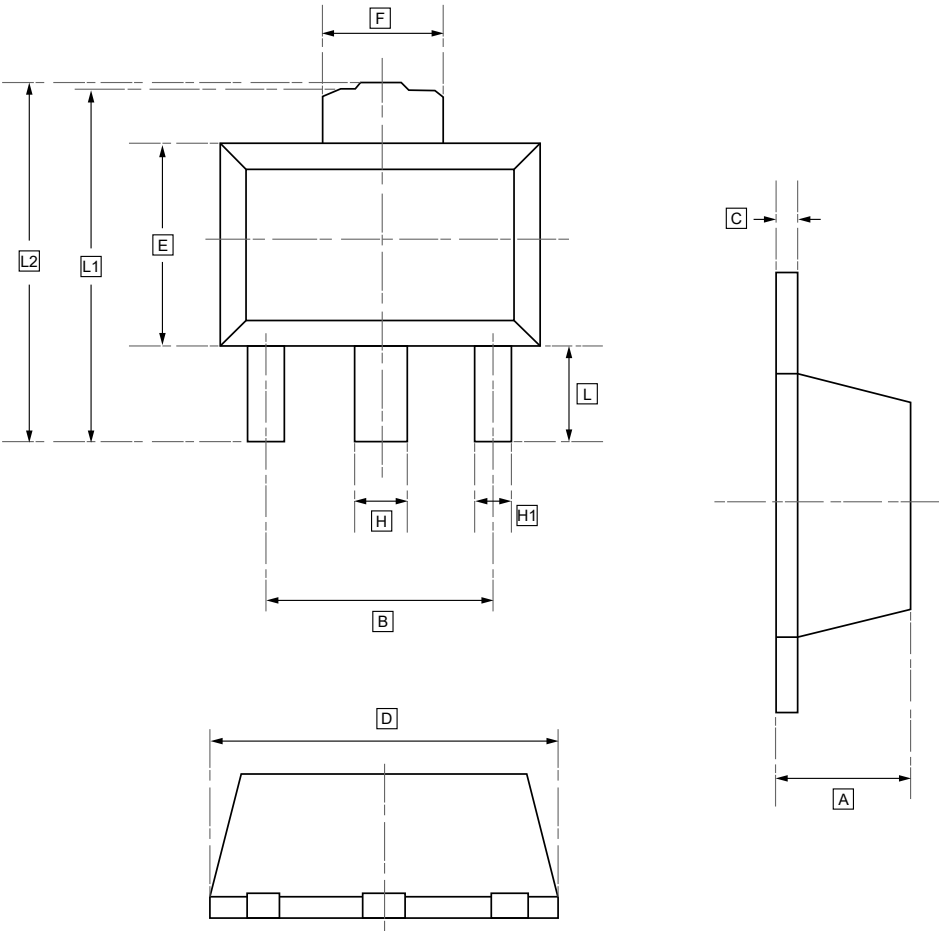

DIMENSIONS (mm are the original dimensions)

Symbol	A	B	C	D	E	F	H	H1	L	L1	L2
Min	1.450	2.950	0.330	4.450	2.450	1.650	0.450	0.370	0.900	4.100	4.100
Max	1.550	3.050	0.430	4.550	2.550	1.750	0.580	0.480	1.000	4.300	4.350


10.3SOT-23-3 Package Outline Dimensions

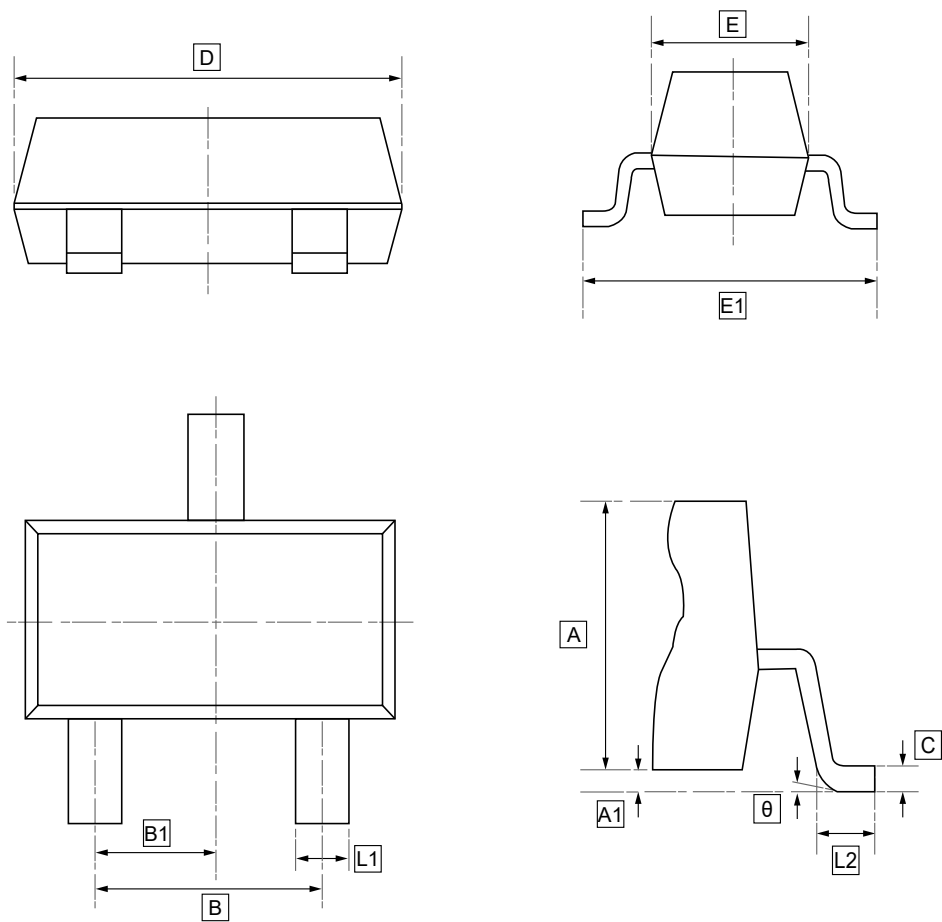

DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	L1	L2	C	D	E	E1	B	B1	θ
Min	1.050	0.000	0.300	0.350	0.100	2.820	1.500	2.700	1.800	0.950	0°
Max	1.150	0.100	0.500	0.550	0.200	3.020	1.700	2.900	2.000	TYP	8°


10.4SOT-23-5 Package Outline Dimensions

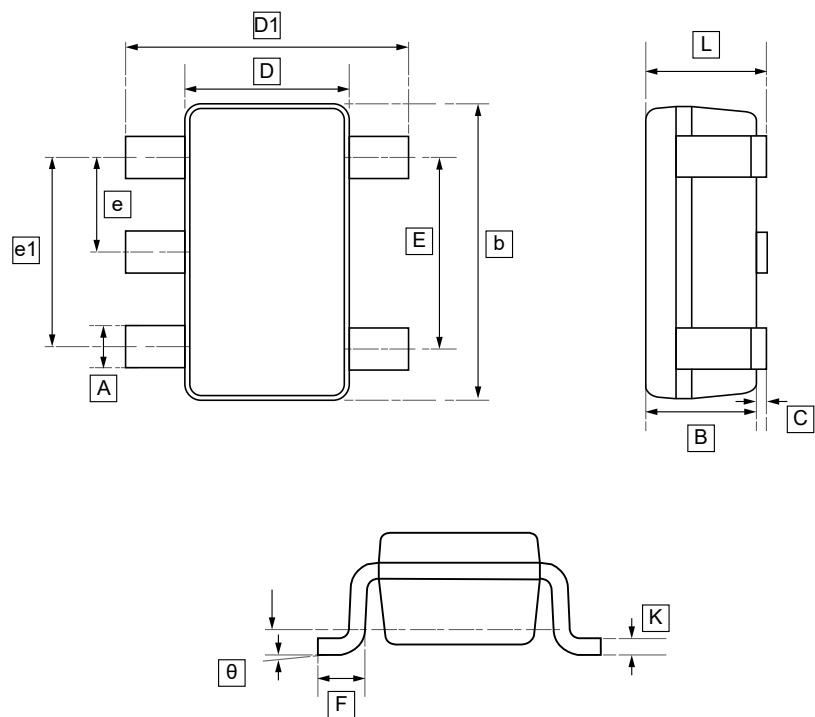

DIMENSIONS (mm are the original dimensions)

Symbol	A	B	b	C	D	D1	E	e	e1	F	L	K	θ
Min	0.3	1.1	2.75	0.00	1.45	2.6	1.9	0.95	1.9	0.3	1.45	0.08	0°
Max	0.5		3.05	0.15	1.75	3.0				0.6		0.22	8°

11.Ordering information

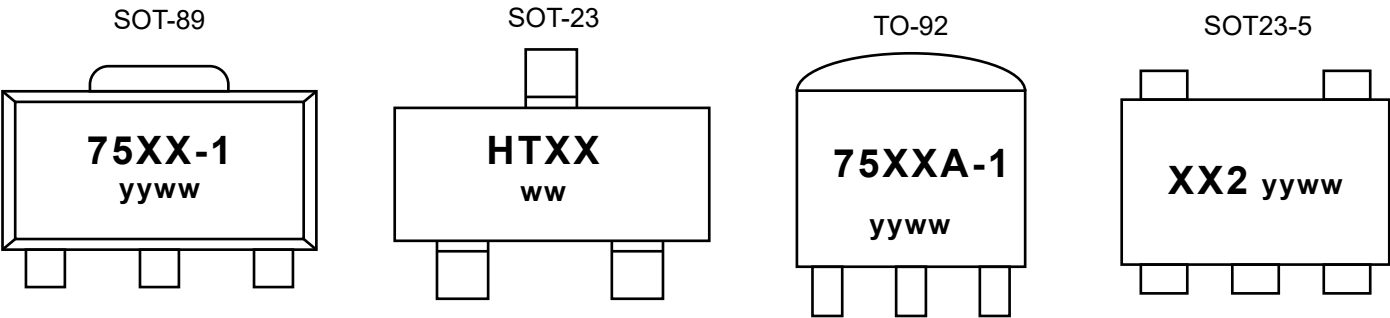

yy: Year Code
ww: Week Code

Order Code	Marking	Package	Base QTY	Delivery Mode
HT75xx-1	75xx-1	SOT-89	1000	Tape and reel
HT75xxS	HTxx	SOT-23	3000	Tape and reel
HT75xxA-1	75xxA-1	TO-92	1000	Tape and reel
HT75xxS-2	xx2	SOT23-5	3000	Tape and reel

Contact Information

TANI website: <http://www.tanisemi.com> Email:tani@tanisemi.com
For additional information, please contact your local Sales Representative.

 is registered trademarks of TANI Corporation.

Product Specification Statement

The product specification aims to provide users with a reference regarding various product parameters, performance, and usage. It presents certain aspects of the product's performance in graphical form and is intended solely for users to select product and make product comparisons, enabling users to better understand and evaluate the characteristics and advantages of the product. It does not constitute any commitment, warranty, or guarantee.

The product parameters described in the product specification are numerical values, characteristics, and functions obtained through actual testing or theoretical calculations of the product in an independent or ideal state. Due to the complexity of product applications and variations in test conditions and equipment, there may be slight fluctuations in parameter test values. TANI shall not guarantee that the actual performance of the product when installed in the customer's system or equipment will be entirely consistent with the product specification, especially concerning dynamic parameters. It is recommended that users consult with professionals for product selection and system design. Users should also thoroughly validate and assess whether the actual parameters and performance when installed in their respective systems or equipment meet their requirements or expectations. Additionally, users should exercise caution in verifying product compatibility issues, and TANI assumes no responsibility for the application of the product. TANI strives to provide accurate and up-to-date information to the best of our ability. However, due to technical, human, or other reasons, TANI cannot guarantee that the information provided in the product specification is entirely accurate and error-free. TANI shall not be held responsible for any losses or damages resulting from the use or reliance on any information in these product specifications.

TANI reserves the right to revise or update the product specification and the products at any time without prior notice, and the user's continued use of the product specification is considered an acceptance of these revisions and updates. Prior to purchasing and using the product, users should verify the above information with TANI to ensure that the product specification is the most current, effective, and complete. If users are particularly concerned about product parameters, please consult TANI in detail or request relevant product test reports. Any data not explicitly mentioned in the product specification shall be subject to separate agreement.

Users are advised to pay attention to the parameter limit values specified in the product specification and maintain a certain margin in design or application to ensure that the product does not exceed the parameter limit values defined in the product specification. This precaution should be taken to avoid exceeding one or more of the limit values, which may result in permanent irreversible damage to the product, ultimately affecting the quality and reliability of the system or equipment.

The design of the product is intended to meet civilian needs and is not guaranteed for use in harsh environments or precision equipment. It is not recommended for use in systems or equipment such as medical devices, aircraft, nuclear power, and similar systems, where failures in these systems or equipment could reasonably be expected to result in personal injury. TANI shall assume no responsibility for any consequences resulting from such usage.

Users should also comply with relevant laws, regulations, policies, and standards when using the product specification. Users are responsible for the risks and liabilities arising from the use of the product specification and must ensure that it is not used for illegal purposes. Additionally, users should respect the intellectual property rights related to the product specification and refrain from infringing upon any third-party legal rights. TANI shall assume no responsibility for any disputes or controversies arising from the above-mentioned issues in any form.